


## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner Center North 1/16 Sec. 28 T. 31N R. 33W P.M.M. Lincoln County

1. This corner not previously set.
2. Found Hwy. R/W monument S4°36'10"E from corner 10.69 ft.
3. Set a 5/8" X 24" rebar, capped, with J.H.N. 4661S stamped on cap from which:  
 An 8" Fir bears S81°W 14.3 ft. scribed CN 1/16 S28 BT.  
 A 6" Pine bears South 14.2 ft. scribed CN 1/16 S28 BT.  
 A Location poster and attention sign on a 4" Pine bears S50°E 10.1 ft.  
 Posted bearing trees with bearing tree signs.

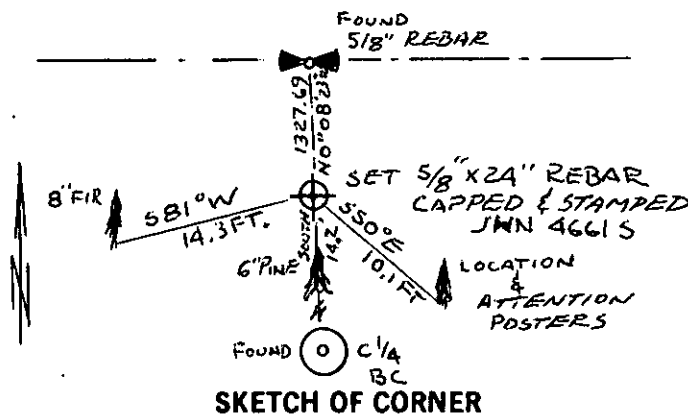

SKETCH OF CORNER

## CERTIFICATION

I, David Stanley

certify the information shown hereof is true and correct.

David Stanley  
Signature Ground Party Chief

I, Jack H. Ninneman

certify that this Corner Record correctly represents work performed by me or under by direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)


Jack H. Ninneman  
Signature of Surveyor & Seal

Date: 4/16/84 Reg. No. 4661S

Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the April 23 day of 1984 was noted on the cross-index plat and is assigned page No. 2607, in book No. \_\_\_\_\_  
Kenneth F. Siegel by Betty L. Conces  
 County Official Deputy

Sec. 28



Cross Index No. \_\_\_\_\_ T. 31N R. 33W P.M.M.

• corner this sheet