

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner RM to South Meander Corner Sec. 13 T. 31 N. R. 33 W. P.M.M. Lincoln County

I. 1893 Original GLO Survey by Daniel P. Mumbrue:

At 54.58 chains and the left bank of the Kootenai River.

Set a slatestone, 24 x 10 x 10 ins. 18 ins. in a mound of stone, 2 ft. high, 4 ft. base, for meander cor. to frac. secs. 13 and 14, marked M.C. on the N. face (impossible to dig) from which:


A fir, 18 ins. in diam., bears N 60° 45' E. 331 lks. dist. marked T 31 N R 33 W S 13 MC B T.

A fir, 10 ins. in diam., bears S 34° 30' W, 37 lks. dist. marked T 31 N R 33 W S 14 MC B T.

- II. I found remains of both the original bearing trees, one standing snag (NE) and a partially buried stump (SW), both with scribing visible. The original stone is considered lost as its original position lies on a steep rocky slope along the high water line of the Kootenai River. As the original stone was not set in the ground but only in a mound of stone, the stone has rolled down the slope into the river below or was swept away by high water.

- III I calculate the position for the new meander corner by using record bearing and distance from the SW original bearing tree only. The distance to the NE bearing tree is in error, therefore I omit this measurement.

The corner position lies on the face of a rock ledge and impossible to set. Therefore, I set an Reference Moument, a 3/4 ins. diam. x 30 ins. long, aluminum rod with a 3 1/4 in. diam. U.S.D.A. aluminum cap, 26 ins. above the ground, which bears S16° 10' 44" E, 14.6 ft. dist., marked as shown:



## Original Bearing Tree:

A fir stump, 1 ft. high and nearly obliterated by large boulders, bears S74° W, 18.2 ft. dist., scribing visible.

A fir snag, 26 ins. diam., bears N58° E, 226.1 ft. dist., healed blaze


## I established 2 new bearing trees:

A fir, 8 ins. diam. bears S87° W, 16.2 ft. dist., scribed RM MC BT.

A fir, 5 ins. diam., bears S13° W, 13.5 ft. dist., scribed X BT.

I place a 1 ft. diam. collar of stone around the moument.

I painted blazes and red bands around bearing trees and set a 6 ft. galvanized steel post with a Survey Marker decal attached, 3 ft. South of monument and attached Bearing Trees and Land Survey Monument signs on the bearing trees.

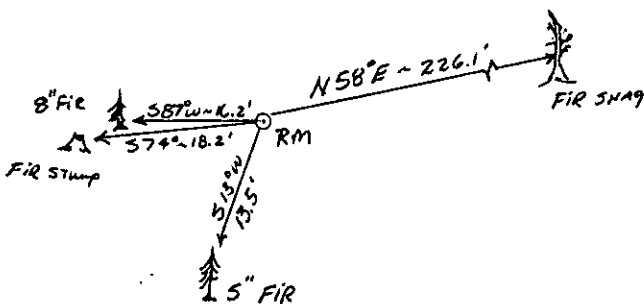

SKETCH OF CORNER

## CERTIFICATION

I, Steve Boyer

certify the information shown herein is true and correct.

Steve A. Boyer  
Signature of Ground Party Chief

I, Alvah F. Hughes

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Montana Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes  
Signature of Surveyor & Seal

Date: 12/28/89 Reg. No. 732296

Employer: U.S. FOREST SERVICE


Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Dec 29, 1989

was noted on the cross-index plat and is assigned page No. 4193, in book No. \_\_\_\_\_

Cross Index No. .27 K21

T. 31N R. 33W P.M.M.

Sec. 13



• corner this sheet