


- INSTRUCTIONS**
1. Original and/or sub record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
 5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Center North 1/16 Sec. 36 T. 31N R. 34W P.M.M. Lincoln County

Record: Not previously set.

Set: a capped 5/8" X 24" steel pin (stamped J.H.N. 4661S) from which a 16" Fir' bears N 64° E 41.5 feet scribed CN 1/16 B.T. and posted.
A 5/8" X 24" capped steel pin stamped as above bears N 89° 44' 39" E 20 ft. for witness corner.

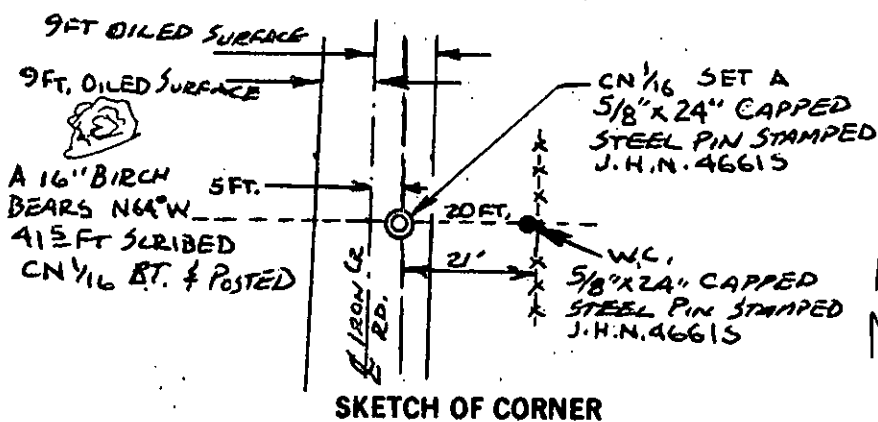

SKETCH OF CORNER

CERTIFICATION

I, Jack H. Ninneman
certify the information shown herein is true and correct.

Jack H. Ninneman
Signature Ground Party Chief

I, Jack H. Ninneman
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)


Jack H. Ninneman
Signature of Surveyor & Seal

Date: 7/10/81 Reg. No. 4661S..

Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the 14th of July day of 1981, was noted on the cross-index plat and is assigned page No. 1095, in book No. 1

Thomas L. Vaughan by Betty Bell
County Official Deputy



Cross Index No. Sec. 36 T. 31N R. 34W P.M.M.

W-23

• corner this sheet