

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**

E 1/16 Sec Corner  
 Corner: Section 1 & 36 T. 31 & 32N. R. 34W. P.M.M. Lincoln County

1983 Record: From Corner Recordation Form (Bk. 1, Pg 255) by JWN 534ES, set brass cap and  
 (Hill 5612S) established 2 bearing trees.

Found 2-1/4 ins. dia. brass cap, approx. 6 ins. out of the ground.

From which:

- Fir, 8 ins. dia., bears S06°E, 23.1 ft., mkd "1/16E"
- Uprooted tree, bears N30°W, 9.8 ft., mkd "1/16E"

Scribed a new bearing tree:

Fir, 10 ins. dia., bears N05°W, 16.5 ft., mkd "E 1/16 S36 BT"

2010 Found: We find a 2-1/4 ins. dia. brass cap, marked as shown below, on 2 ins. dia. steel pipe, rising 0.5 ft. from a loose collar of stone.

From which:

- Fir stump w/ fallen log, 11 ins. dia., bears N05°W, 16.5 ft., w/ overgrown blaze & BT tag on log
- Downed Fir snag, 10 ins. dia., bears S09°E, 22.8 ft., w/ overgrown blaze & BT tag
- Fir stump & downed log, 15 ins. dia., bears S43°E, 68.1 ft., w/ blaze & BT tag


2010 Perpetuation: We establish new reference monuments as follows:

- Ponderosa Pine, 14 ins. dia., bears S65°30'W, 12.5 ft., scribed "E1/16 S1 BT"
- Ponderosa Pine, 9 ins. dia., bears N15°30'W, 23.3 ft., scribed "E1/16 S36 BT"

We set a galvanized steel post, North, 0.9 ft. from the monument w/ LSM and USFS boundary decals.

We build up the collar of stone.

Bearing trees were affixed with BT tags, snow blazed and a painted red band.

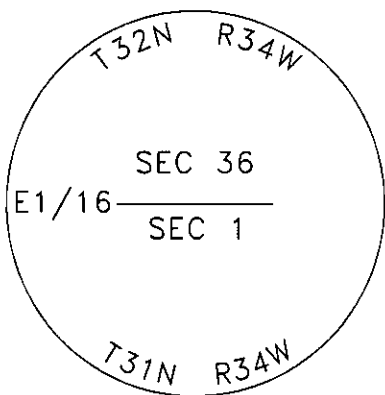

**SKETCH OF CORNER**

**CERTIFICATION**  
 I, Keith Brandt  
 certify the information shown herein is true and correct.

*Keith Brandt*  
 Signature Ground Party Chief

I, Ken E Jenkins  
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101).

*Ken E Jenkins*  
 Signature of Surveyor & Seal REGISTERED LAND SURVEYOR

Date: 12/2010 Reg. No. 9330

Employer: Montana Northwest Company  
PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Office of Clerk and Recorder County of \_\_\_\_\_ This "corner  
 231782 BOOK: CCR CC&R'S PAGE: 11751 Pages: 1  
 record" was filed for rec STATE OF MONTANA LINCOLN COUNTY  
 was noted on the cross-i RECORDED: 03/30/2011 11:02 KOI: CC&R'S  
 book No. \_\_\_\_\_ TAMMY D. LAUER CLERK AND RECORDER  
 FEE: \$0.00 BY: *Tammy D. Lauer*  
 TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 1
