

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**Corner: Sec. Corner, Sections 1, 6, 31 & 36 T. 31, 32N. R. 33, 34W. P.M.M. Lincoln County

1893 GLO Record: Set post and established 4 bearing trees.

1910 Record: Reset post.  
(Lyman)

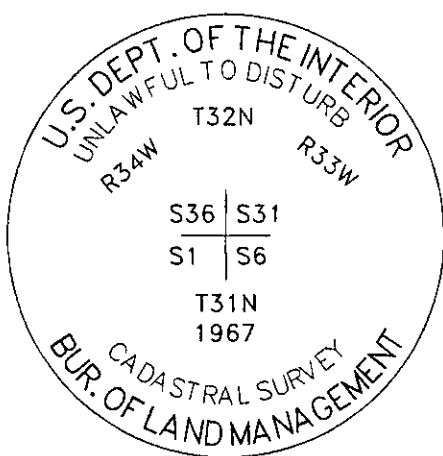
1968 Record: Found iron bar & the remains of 1 original bearing tree.  
(Damnn) Set iron post with brass cap. Buried original iron bar alongside. Established 3 new bearing trees.

1983 Record: 1967 BLM Record: From original found evidence, set 2-1/2 ins. dia. iron post. Established 3 new bearing  
(Hill 5612S) trees. Found 2-1/2 ins. dia. iron post, 4 ins. out of the ground, with brass cap. From which:  
Larch, 21 ins. dia., bears S33°W, 7.8 ft., w/ healed face  
Douglas Fir, 11 ins. dia., bears N24°W, 22.4 ft., w/ healed face  
Douglas Fir, 11 ins. dia., bears N20°E, 22.7 ft., w/ healed face  
Douglas Fir, 10 ins. dia., bears S49°E, 23.3 ft., w/ healed face

1993 Record: Found 2-1/2 ins. dia. iron pipe, 3 ins. above the ground, firmly set with a 3-1/4 ins. dia. BLM brass cap.  
(Hughes 7322LS) From which:  
Larch, 14 ins. dia., bears N20°30'E, 57.6 ft., w/ healed face  
Pine, 8 ins. dia., bears S34°E, 56.1 ft., w/ healed face  
Larch, 14 ins. dia., bears S67°30'W, 57.2 ft., w/ healed face

2010 Found: We find a 3-1/4 ins. dia. brass cap, as shown below, on 2-1/2" dia. pipe, rising 0.5 ft. from a mound of  
stone. From which:  
Douglas Fir, 14 ins. dia., bears N20°E, 22.4 ft., w/ overgrown blaze & BT tags  
Douglas Fir, 11 ins. dia., bears S54°E, 23.1 ft., w/ overgrown blaze & BT tags  
Larch, 20 ins. dia., bears S30°W, 7.3 ft., w/ overgrown blaze & BT tags  
Douglas Fir, 12 ins. dia., bears N25°30'W, 22.4 ft., w/ overgrown blaze & BT tags  
Fence post, bears North, 2.2 ft.  
NOTE: Found bearing and distances to reference monuments do not match record.

2010 Perpetuation: We establish no new reference monuments.  
Bearing trees were affixed with BT tags and a painted red band.

**SKETCH OF CORNER****CERTIFICATION**I, Keith Brandt  
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Ken E Jenkins  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101; et seq., M.C.A.)

Signature of Surveyor &amp; Seal

Date: 10/2010 Reg. No. 9330 LSEmployer: Montana Northwest Company

PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Sec. 1

Office of Clerk and Recorder, County of \_\_\_\_\_ This "corner  
record" was filed for record 231794 BOOK: CCR CC&R'S PAGE: 11763 Pages: 1  
STATE OF MONTANA LINCOLN COUNTY  
was noted on the cross-index RECORDED: 03/30/2011 11:14 KOI: CC&R'S  
TAMMY D. LAUER CLERK AND RECORDER  
book No. FEE: \$0.00 BY: Francie Jensen Deputy  
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Cross Index No. A25 T. 31N R. 34W PMM

● - Corner this sheet