INSTRUCTIONS

- Original and/or subsequent record used to evaluate the corner position.
 Oescription of evidence found, note discrepancies in the record, state method of establishing lost or offilterated.
- Description of monument and accessories set to perpetuate the corner position.
 Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
- Certification must be signed and scaled by Registered Land Surveyor in State of Montana.
 Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corne N Corner Sec. 15 T. 31N 34W P.M.M. Lincoln R. . County

1. 40.04 chains:

Set a limestone, 14 X 8 X 6 inches, 10 inches in the ground, for 4 Section corner, marked 4 on N. face; from which,

A Fir, 14 inches diameter, bears S.42045'W., 80 links distance,

marked \S15B.T.

A Pine, 24 inches diameter, bears N.60°W., 32 links distance,


marked 4SlOB.T.

2. Found: B.L.M. Standard brass capped monument marked as shown below from which, A 14" Fir bears S.77½°E 34 links. Scribing overgrown. Posted. A 14" Fir bears S.122°W 62 links. Scribing overgrown. Posted. A location poster on a 4" Fir bears N.38°E 17.0 feet. Painted monument and accessories with bright red paint.



book No. .

Found B.L.M. standard brass capped monument marked as shown.

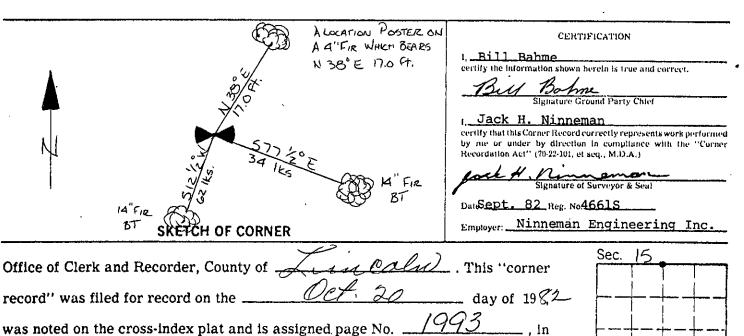

Eleanor L. Vaugha by

J-15

T, 31N R, 34W PMM

- corner this sheet