


INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill In Cross Index & Section Diagram at bottom of sheet.


CERTIFIED CORNER RECORDATION

Corner NW Corner Sec. 15 T. 31N R. 34W P.M.M. Lincoln County

1. 80.00 Chains: Set a limestone, 16x10x8 ins., 11 ins. in the ground, for cor. of secs. 9,10,15 and 16, marked with 4 notches on S. and 3 notches on E. edges, from which
 A tamarack, 6 ins. diam., bears N28°30'E 32 lks, dist., marked T 31N R34W S10 BT
 A hemlock, 6 ins. diam., bears S.52°15'E., 37 lks. dist., marked T31N R34W S 15 BT.
 A hemlock, 8 ins. diam., bears S54°30'W., 20 lks. dist., marked T31N R34W S16 BT.
 A tamarack, 6 ins. deam. bears N48°W., 15 lks. dist., marked T31N R34W S9 BT.
2. Found original stone as per G.L.O. records from which,
 A 6" Larch bears N48°W 6 links scribed T 31 N R 34 W S 9 B.T. and posted.
 A 10" Fir bears S87°W 21 links scribed T 31 N R 34 W S 16 B.T. and posted.
3. Set: A 3"x30" aluminum capped monument marked as shown below from which,
 An 8" Fir bears S60°E 9.2 feet scribed T 31 N R 34 W S 15 B.T. and posted
 An 8" Fir bears N15°E 13.0 feet scribed T 31 N R 34 W S 10 B.T. and posted.
 A location poster on an 8" Fir bears N3°W 8.3 feet.
 Buried stone alongside monument.
 Painted monument and accessories with bright red paint.



Set 3" aluminum monument marked as shown.

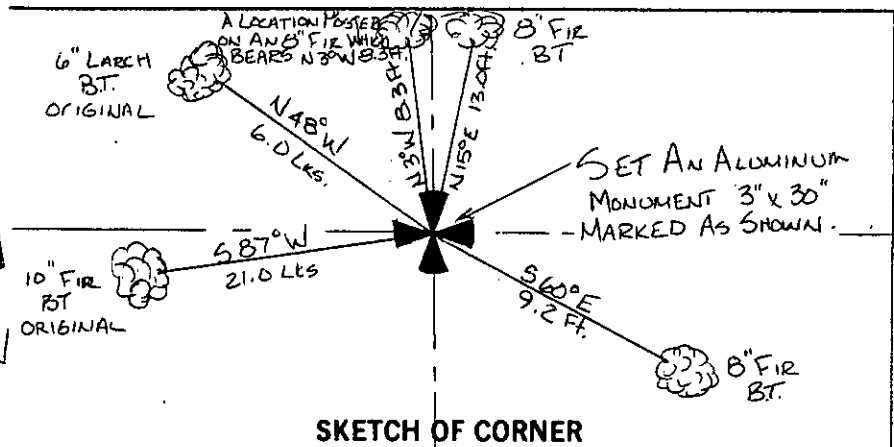

CERTIFICATION

I, Jack H. Ninneman
 certify the information shown herein is true and correct.

Jack H. Ninneman
 Signature Ground Party Chief

I, Jack H. Ninneman
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Jack H. Ninneman
 Signature of Surveyor & Seal

Date: Sept. 82 Reg. No. 4661S.

Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the Dec. 9 day of 1982 was noted on the cross-index plat and is assigned page No. 2093, in book No. _____

Eleanor L. Vaughn by Betty L. Conner,
 County Official *deputy*

