

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.


CERTIFIED CORNER RECORDATION

Corner SW Corner Sec. 16 T. 31N R. 34W. P.M.M. Lincoln County

1. 80.00 Chains: Set a granite stone, 16x12x6 ins., 11 ins. in the ground, for cor. of secs. 16,17,20 and 21, marked with 3 notches on S. and 4 notches on E. edge; from which
A fir, 20 ins. diam., bears N.64°E., 36 lks. dist., marked T 31 N R 34 W S 16 B T.
A fir, 24 ins. diam., bears S.31°E., 72 lks. dist., marked T 31 N R34 W S21 B T.
A tamarack, 20 ins. diam., bears S.31°E., 72 lks. dist., marked T31 N R 34 W S 20 B T.
A pine, 20 ins. diam., bears N.44°W., 5 lks. dist., marked T 31 N R 34 W S 17 B T.
2. Found original stone as per G.L.O. records from which,
A 28" Pine snag bears N44°W 5 links scribed as per G.L.O. records.
A 28" Larch bears S31°W 103 links scribed as per G.L.O. records.
A 36" snag bears S31°E 72 links scribed as per G.L.O. records.
3. Set: A 3"x30" aluminum capped monument marked as shown below from which,
A 16" Fir bears N79°W 13.0 feet scribed S17 B T and posted.
An 18" Fir bears N7°E 18.6 feet scribed S16 B T and posted.
A 20" Fir bears S32°E 26.3 feet scribed S 21 B T. and posted.
An 18" Fir bears S34°W20.3 feet scribed S 21 B T and posted.
A location poster on a 10" Fir bears S74°W 8.6 feet.
Painted monument and accessories with bright red paint.
Buried original stone alongside monument.



Set 3" aluminum monument marked as shown.

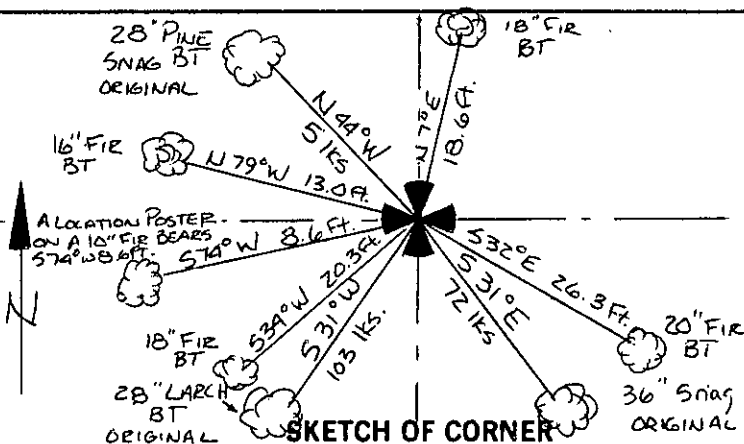

CERTIFICATION

I, Jack H. Ninneman
certify the information shown herein is true and correct.

Jack H. Ninneman
Signature Ground Party Chief

I, Jack H. Ninneman
certify that this Corner Record correctly represents work performed by me or under by direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Jack H. Ninneman
Signature of Surveyor & Seal


Date: Oct. 82 Reg. No. 4661S

Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the Dec. 9 day of 1982 was noted on the cross-index plat and is assigned page No. 2094, in book No. _____

Eleanor L. Vaughn by Betty L. Conness
County Official *deputy*

Cross Index No. N-9 T. 31N R. 34W P.M.M.



• corner this sheet