


INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 22/23
27/26 T. 31N R. 34W P.M.M. Lincoln County

- I. From original 1903 G.L.O. Notes:
 Set a granite stone 10"x10"x6", 10 ins. in the ground for cor. of Secs. 22,23,26, and 27 marked with 2 notches on S., and 2 notches on E. edges, from which:
 A Pine 6" dia. bears N.16°15'E., 25 lks. dist. marked T31N.,R34W., S.23 B.T.
 A Pine 8 ins. dia., bears S.5°30'E., 10 lks. dist. marked T31N.,R34W., S.26 B.T.
 A Pine 8 ins. dia. bears S.36°45'W., 30 lks. dist. marked T31N., R34W., S.27 B.T.
 A Pine 6 ins. dia., bears N.26°30'W., 32 lks. dist. marked T31N.,R34W., S.22 B.T.
- II. Found original stone 10"x10"x6" out of place 3', w/2 visible notches on South and East edges.
 Found 2 remains of fallen Pine, bearing S36°45'W. @ 19.8 ft.
 Found 2 down 6" Pine, bearing N.26°30'W. @ 21.1 ft.
 Found stumpholds in NE. & SE. Sec. corners.
- III. Set a U.S.D.A. Aluminum Mon. w/cap.
 Set an 8" Fir B.T., bears N.36°E., @ 34.3 ft., scribed S.23 B.T. w/54-3 tag.
 Set a 12" Larch B.T., bears S.62°E., @ 25.9 ft., scribed S.26 B.T. w/54-3 tag.
 Set a 6" Cedar B.T., bears S.84°W., @ 22.7 ft., scribed S.27 B.T. w/54-3 tag.
 Set an 8" Fir B.T., bears N.32°W., @ 37.7 ft., scribed S.22 B.T. w/54-3 tag.

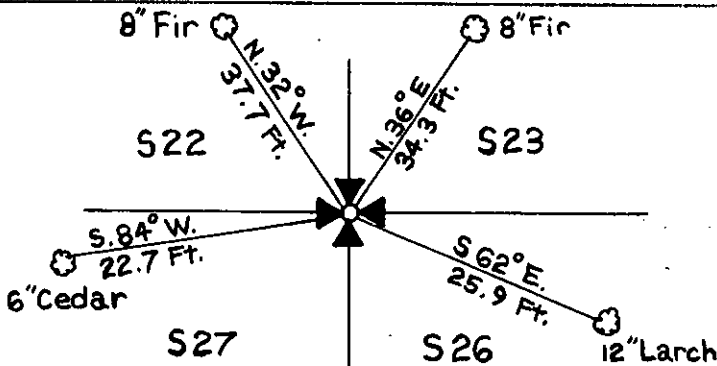

SKETCH OF CORNER

CERTIFICATION

I, Kent Bauer
 certify the information shown herein is true and correct.
Kent Bauer
 Signature Ground Party Chief

I, Carl R. McMillen, L.S.
 certify that this Corner Record correctly represents work performed by me or under by direction in compliance with the "Corner Recordation Act" (78-22-101, et seq., M.D.A.)
Carl R. McMillen
 Signature of Surveyor & Seal

Date: JAN 35 Reg. No. 4659S
 Employer: Carl R. McMillen, & Associates

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Mar 4 day of 1985 was noted on the cross-index plat and is assigned page No. 3027 in book No. _____

Janet B. Sneyd by Bill Sneyd
 County Official Deputy

