

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 Cor. of Sec. 35 only T. 31 N. R. 34 W. P.M.M. Lincoln County

- I. 1903 original, G.L.O. record by Allen B. Benedict: "Set a granite stone, 16x10x4 ins., 11 ins. in the ground for 1/4 sec. cor., marked 1/4 on N. face, from which

A fir, 7 ins. diam., bears N84°30'E, 27 lks. dist., marked 1/4 S35 BT.

A fir, 4 ins. diam., bears S60°15'E, 60 lks. dist., marked 1/4 S2 BT."

- II. Found a loose stone, slid downhill 4 ft. from original position, mkd. 1/4 on a face, depression at original position, from which

A fir stump, bears N84°E, 17.8 ft. (27 lks.) dist., mkd. S. (G.L.O. rcd.)

A rotten fir stump, bears S58°E, 50.2 ft. (76 lks.) dist., mkd. M/ /BT. (Unknown record).

- III. At record G.L.O. bearing - distance from NE bearing tree, set a 2 1/2 ins. dia. aluminum pipe, 30 ins. long, 26 ins. in the ground with attached 3 1/4 ins. dia. U.S.D.A. Forest Service aluminum cap, marked as shown:

T31N R34W
1/4 S35
T30N R34W
7322LS
1991

Establish two new bearing tree:

A fir, 10 ins. dia., bears N32°E, 30.1 ft. dist., mkd. T31N R34W 1/4 S35 BT.


A fir, 8 ins. dia., bears N12°W, 40.3 ft. dist., mkd. T31N R34W 1/4 S35 BT.

Set a 6 ft. galvanized steel guard post with "Survey Marker" decal attached, 4 ft. East.

Painted a red band around each bearing tree and attached "Land Survey Monument" & "Bearing Tree" signs

Bury original stone alongside aluminum pipe.

Magnetic Declination: East, 20°

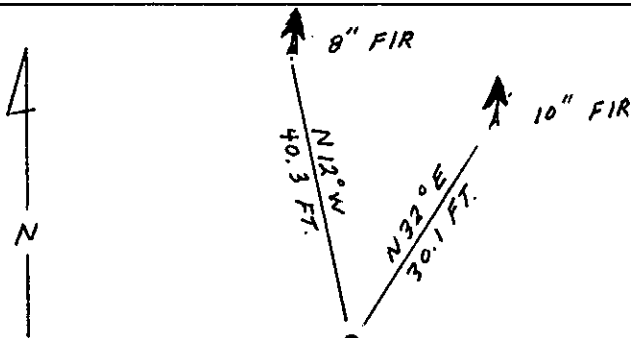

SKETCH OF CORNER

CERTIFICATION

I, Steve Boyer
certify the information shown herein is true and correct.

Steve A. Boyer
Signature Ground Party Chief

I, Alvah F. Hughes
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes
Signature of Surveyor & Seal

Date: 11/6/91 Reg. No. 7322 LS


Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 4-22-92 was noted on the cross-index plat and is assigned page No. 5958, in book No. Corral Fork Comm. Maps

County Official

Cross Index No. Z19 T. 31 N R. 34 W PMM

Sec. 35

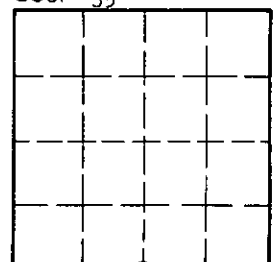

• - corner this sheet