

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 cor. secs. 23 and 26 T. 31 N. R. 34 W. P.M.M. Lincoln County

I. 1903 G.L.O. record by A. B. Benedict: "Set a sandstone, 15x10x5 ins., 10 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N face; from which

A pine, 22 ins. diam., bears S34°W, 34 lks. dist., marked 1/4 S26 BT.

A fir, 28 ins. diam., bears N74°30'W, 39 lks. dist., marked 1/4 S23 BT.

1985 Corner Recordation by C. R. McMillen: "Found original stone 15"x10"x5", 10 ins. in the ground visible 1/4 on North face.

Found 22" fallen pine, S34°W @ 22.4 ft. w/ visible scribe (1/4 S24 BT)

Found 28" fir stump & fallen tree, N74°30'W, @ 25.7 ft. No visible scribe.

Set a 2 1/2"x30" Alum. Mon. W/ 3" alum. cap, set in a rock cairn.

Set tag W/ blaze on a 5" fir, bearing S16°W @ 31.0 ft.

Set tag W/ blaze on a 7" Fir, bearing N60°W @ 5.8 ft."

II. Found a stone, 10x5 ins., 8 ins. out of ground, mkd. 1/4 on N face (not monumented as indicated on 1985 recordation); from which


A fir, 7 ins. diam., bears S21°W, 31.7 ft. dist.

A fir, 8 ins. diam., bears N50°W, 5.8 ft. dist.

A rotten & down pine, 22 ins. diam., bears S42°W, 22.3 ft. (34 lks.) dist., mkd. 1/4 S24 BT.

(G.L.O. record: S34°W, mkd. 1/4 S26 BT).

III. Set a 2 1/2 ins. diam. aluminum pipe, 30 ins. long, 22 ins. in the ground, with 3 1/4 ins. diam. aluminum, U.S.D.A., Forest Service cap, marked as shown:



Scribed the two 1985 bearing trees:

A fir, 7 ins. diam., bears S21°W, 31.7 ft. dist., I mark 1/4 S26 BT.


A fir, 8 ins. diam., bears N50°W, 5.8 ft. dist., I mark 1/4 S23 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker & Property Boundary decals, East, 3 ft.

Bury original stone alongside new aluminum monument.

Magnetic Declination: 20° East

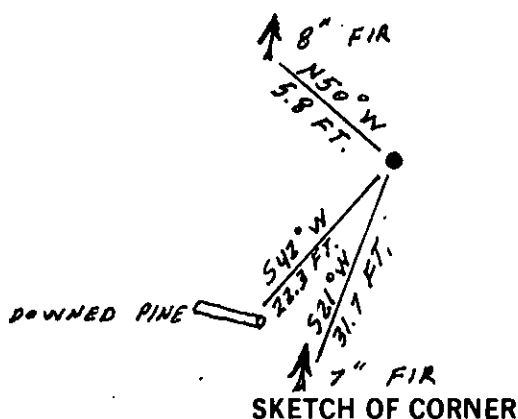

CERTIFICATION

I, Thomas M. Hommel
certify the information shown herein is true and correct.

Thomas M. Hommel
Signature of Ground Party Chief

I, Alvah F. Hughes
certify that this Corner Record correctly represents and is performed by me or under my direction in compliance with the Montana Corner Recordation Act" (70-22-101, et seq., M.C.A.).

Alvah F. Hughes
Signature of Surveyor & Seal

Date: 12/10/92 Reg. No. 7322 LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 12-14-92 was noted on the cross-index plat and is assigned page No. 5132, in book No. Coral M Cummings by Eric Brachoff


County Official

R-19

31 N

34 W

Cross Index No. _____ T. _____ R. _____ PMM



• - corner this sheet