CROSS INDEX PLAT

T. 31   R. 34 .... MER.

The grid diagram shows township sections A–Z rows and columns 1–25, with section numbers arranged as follows:

Top row of sections: 6, 5, 4, 3, 2, 1
Second row: 7, 8, 9, 10, 11, 12
Third row: 18, 17, 16, 15, 14, 13
Fourth row: 19, 20, 21, 22, 23, 24
Fifth row: 30, 29, 28, 27, 26, 25
Bottom row: 31, 32, 33, 34, 35, 36
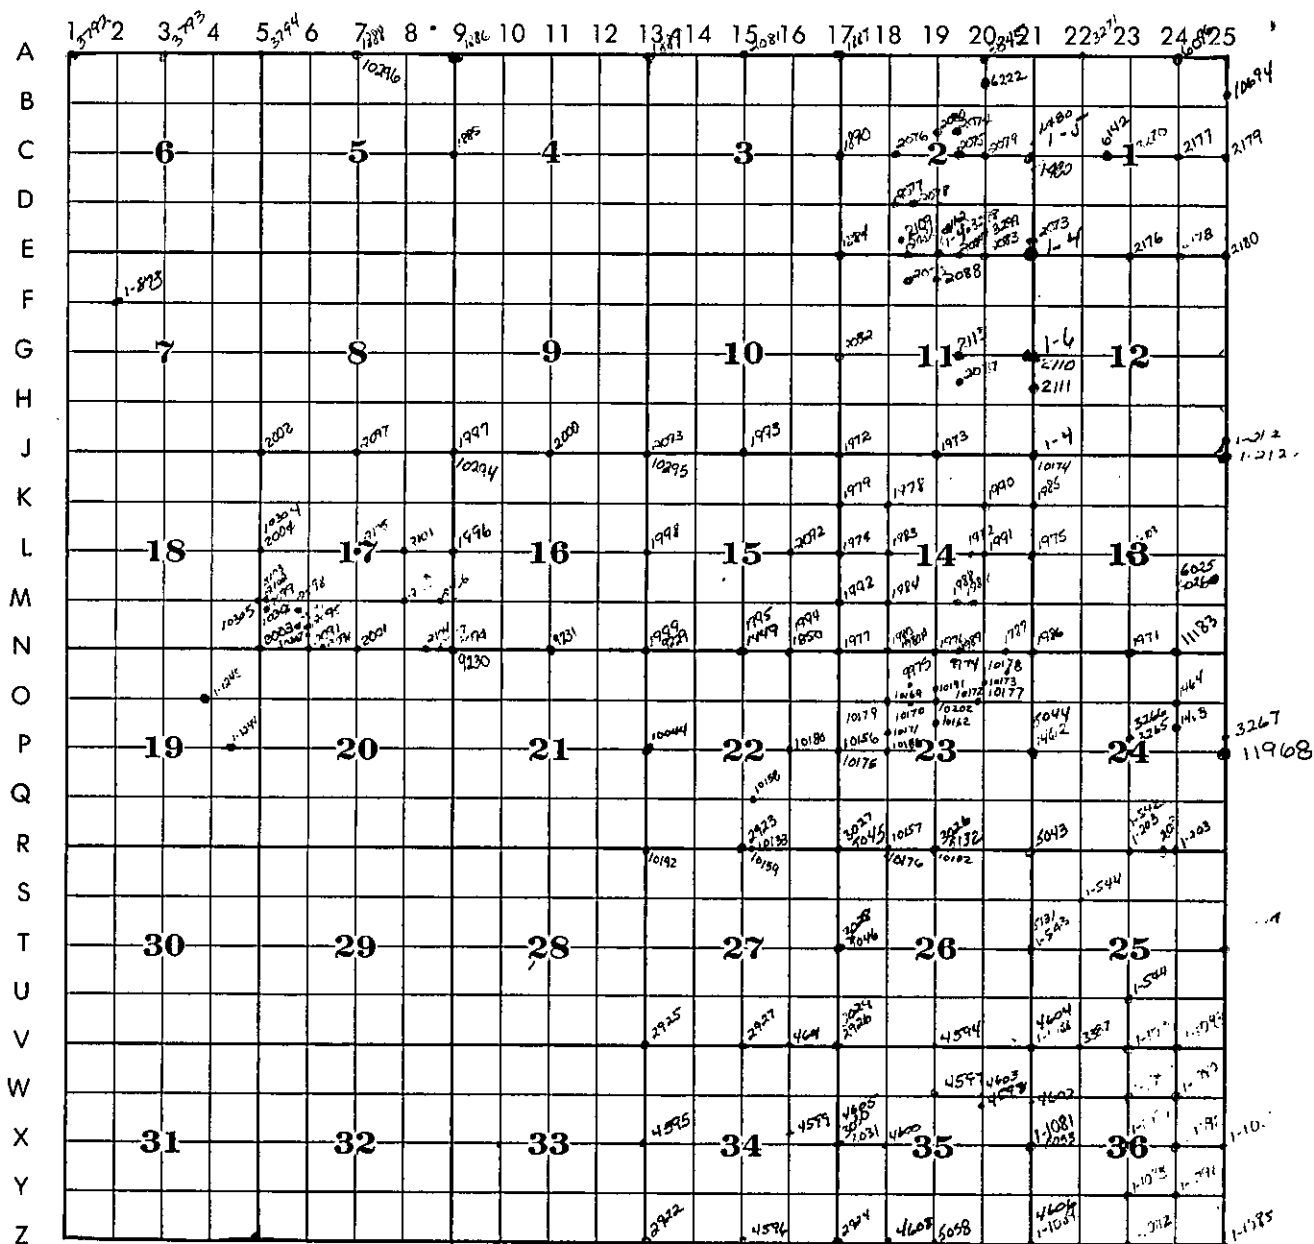
LEGEND

●   Corners filed under this cross index plat.

⊕   Certificates filed in adjoining township as indicated by solid quandrant(s).

Each corner certificate is identified by an alphabetical-numerical coordinate number which is derived from the system shown on the above township diagram. For example, the quarter-corner between Sections 5 and 6 is identified as Corner C-5.

Corners such as meander corners or subdivision corners which are not located at intersecting lines on the above diagram will be identified by reference to the nearest applicable coordinate lines, thus: AB-1; M-1-2; VW-19-20.

Corners common to adjoining townships will be identified by coordinates of the townships in which the certificates are to be filed.

Within each township record, the certificates will be filed in alphabetical-numerical sequence.

R 34

CROSS INDEX PLAT

T. *31*   R. *34*   MER.

Column headers: 1 2 3 4 5 6 7 *11760* 8 9 *11759* 10 11 *11753* 12 13 14 15 *11756* 16 17 *11758* 18 19 *11755* 20 *11754* 21 *11761* 22 *11762* 23 *11752* 24 25 *11763*

Rows A–Z grid with section numbers:

C: 6 5 4 3 2 1
G: 7 8 9 10 11 12
L: 18 17 16 15 14 13
M: *11305 11310 11308* (notations near col 7-8)
O: *11604* (near col 19-20)
P: 19 20 21 22 23 24
T: 30 29 28 27 26 25
X: 31 32 33 34 35 36

LEGEND

● Corners filed under this cross index plat.

⊕ Certificates filed in adjoining township as indicated by solid guandrant(s).

SE Cor. Lot 2 Blk 2 HARTWELL Add 10448

Each corner certificate is identified by an alphabetical-numerical coordinate number which is derived from the system shown on the township diagram. For example, the quarter-corner between Section 5 and 6 is identified as Corner C-6.

Corners such as meander corners or subdivision corners which are not located at intersecting lines on the above diagram will be identified by reference to the nearest applicable coordinate lines, thus: AB-1; M-1-2; VW-19-20.

Corners common to adjoining townships will be identified by coordinates of the townships in which the certificates are to be filed.

Within each township record, the certificates will be filed in alphabetical-numerical sequence.

FORM 126 — 41483   T. *31*   R. *34*   MER.

Pg 2