

INSTRUCTIONS

1. Original and or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner W. 1/4 Cor. Sec. 6 T. 33 N. R. 25 W. P.M.M. LINCOLN County

ORIGINAL RECORD G.L.O. 1934

Set an iron post, 3 ft. long, 1 in. dia., 12 ins. in the ground, to bedrock and in a mound of stone to top, for the 1/4 sec. cor. of sec. 6 only, with brass cap marked:

1/4 S 6 from which:
 1934 A fir, 6 ins. dia., bears N 23 1/4° E, 75 lks. dist., mkd. 1/4 S 6 BT.
 A pine, 20 ins. dia., bears S 52° E, 58 lks. dist., mkd. 1/4 S 6 BT.

B.L.M. REMONUMENTATION 1960

The 1/4 sec. cor. of sec. 6 only, on the W. bdy. of the Tp., monumented with an iron post, 36 ins. long, 1 in. dia., mkd. as described in the official record, loosely set 12 ins. in the ground, from which the remains of the original bearing trees:

A fir, 9 ins. dia., bears N 23 1/4° E, 75 lks. dist., (record), mkd. as described in the official record.

A pine stump, 22 ins. dia., bears S 52° E, 58 lks. dist., (record), mkd. as described in the official record.

At the corner point, reset the iron post 32 ins. in the ground and in concrete, from which:

A fir, 6 ins. dia., bears N 79° E, 75 lks. dist., mkd. X BT.

Raise a mound of stone, 3 ft. base, 2 ft. high, E. of the iron post.

EVIDENCE FOUND

Found a G.L.O. brass cap, mkd. as shown above, from which:

A fir, 14 ins. dia., bears N 23 3/4° E, 50.9 ft. dist., mkd. with an overgrown blaze. (1934 BT)

A pine stump, 22 ins. dia., with scribing visible on tree lying alongside, bears S 52° E, 44.9 ft. dist. (1934 BT)

A dead fir, 8 ins. dia., bears N 79° E, 50.8 ft. dist., mkd. with a visible X, and an overgrown blaze. (1960-BT)


Mound of stone E. of the brass cap.

CORNER PERPETUATION

A new bearing tree:

A fir, 9 ins. dia., bears N 84° E, 57.2 ft. dist., mkd. 1/4 S 6 BT.

Set a galvanized steel post with a Survey Marker decal, 3 ft. East of the brass cap. Painted red bands around the bearing trees and painted the scribing and blazing. Attached Bearing Tree signs and Land Survey Monument signs.

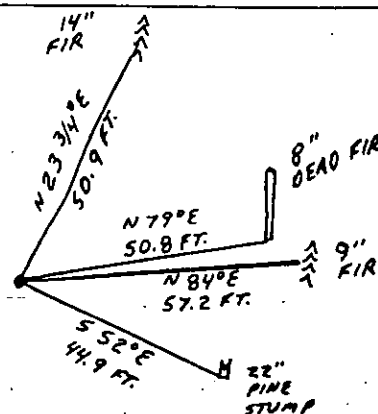

CERTIFICATION

I, _____
 certify the information shown herein is true and correct.

Signature Ground Party Chief

Philip A. Helps

I, _____
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-2-101, et seq., M.D.A.)

Signature of Surveyor & Seal

Date: 10/87 Reg. No. 4739 S


Employer: F & H Land Surveying, Whitefish

DECL. 21° E SKETCH OF CORNER

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the Nov 30 day of 1987, was noted on the cross-index plat and is assigned page No. 3763, in book No. _____

Janet BF Sigel by Bill Sigel
 County Official

Sec. 6

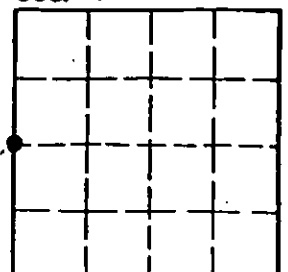

Cross Index No. C - 1 T. 33 N. R. 25 W. P.M.M.

• corner this sheet