

INSTRUCTIONS

1. Original and or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner S.W. Cor. Section 6 T. 33 N. R. 25 W. P.M.M. LINCOLN County

ORIGINAL RECORD G.L.O. 1934

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, to bedrock and in a mound of stone to top, for the cor. of secs. 6 and 7 only, with brass cap marked:

T33N	T33N	from which:
	S 6	
R26W		A pine, 9 ins. dia., bears N 40 1/2° E, 88 lks. dist., mkd. T33N R25W S 6 BT.
S 1	S 7	A pine, 7 ins. dia., bears S 23° E, 10 lks. dist., mkd., T33n R25S S 7 BT.
	R25 W	

1934

B.L.M. REMONUMENTATION 1960

The cor. of secs. 6 and 7 only, on the W. bdy. of the Tp., monumented with an iron post, 36 ins. long, 2 ins. dia., mkd. as described in the official record, loosely set, 16 ins. in the ground, from which the original bearing trees:

A dead pine, 12 ins. dia., bears N 40 1/2° E, 88 lks. dist., (record), mkd. as described in the official record.

A fir, 9 ins. dia., bears S 23° E, 10 lks. dist., (record), mkd. as described in the official record.

At the corner point, reset the iron post, 32 ins. in the ground, and in concrete, from which:

A fir, 6 ins. dia., bears N 47 1/2° E, 59 lks. dist., mkd. T33N R25W S 6 BT.

A fir, 7 ins. dia., bears S 57° E, 47 lks. dist., mkd. T33N R25W S 7 BT.

Raise a mound of stone, 3 ft. base, 2 ft. high, E. of the iron post.

EVIDENCE FOUND

Found a G.L.O. brass cap, mkd. as shown above, from which:

A fir, 12 ins. dia., bears S 23° E, 6.8 ft. dist., scribing visible. (1934 BT)

The GLO 1934 BT located to the N.E. was searched for but no evidence found.


A fir, 9 ins. dia., bears N 47 1/2° E, 39.2 ft. dist., mkd. with an overgrown blaze. (1960 BT)

A fir, 10 ins. dia., bears S 57° E, 30.7 ft. dist., mkd. with an overgrown blaze. (1960 BT)

Mound of stone E. of the brass cap.

CORNER PERPETUATION

Set a galvanized steel post with a Survey Marker decal and a Property Boundary decal, 1 ft. North of the brass cap. Painted red bands around the bearing trees and painted the scribing and blazing. Attached Bearing Tree signs and Land Survey Monument signs.

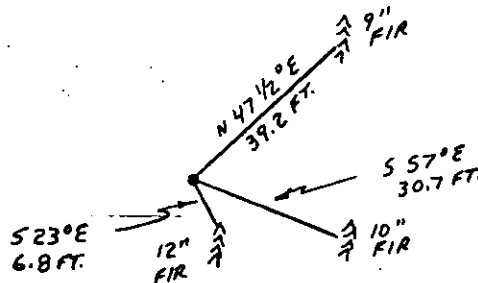

DECL. 21° E SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

Philip A. Helps

I, _____
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-27-101, et seq., M.D.A.)

Signature of Surveyor & Seal

Date: 10/87 Reg. No. 4739 S


Employer: F & H Land Surveying, Whitefish

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the Nov 30 day of 1987, was noted on the cross-index plat and is assigned page No. 3764, in book No. _____

County Official

Cross Index No. E - 1 T. 33 N. R. 25 W. P.M.M.

Sec. 6

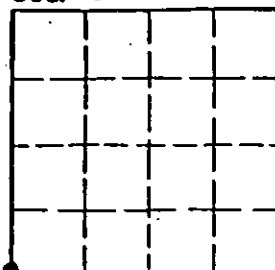

• corner this sheet