

1. Original and/or sul
2. Description of evic
3. Description of mo
4. Sketch of corner, s
5. Certification must
6. Fill in Cross Index

INSTRUCTIONS
179985 BOOK: CCR CC&R'S PAGE: 10666 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 10/18/2004 9:03 KOI: CC&R'S
CORAL M. CUMMINGS CLERK AND RECORDER
FEE: \$0.00 BY: Jeannie Denny
TO: FILED

Q:CO-STD/152
Created 4/8/92

ed corners.

graphy ties, position of accessories,

CERTIFIED CORNER RECORDATION

Corner C 1/4 Sec. 3 T. 33 North R. 26 West P.M.M. LINCOLN County

RECORD:

None Previous.

7/2004

At the point for the C 1/4 corner as determined by standard survey methods, which falls in rock outcropping, I set 5/8"x30" rebar, driven 20" in to rock, with 3-1/4" U.S.D.A. aluminum cap. Raise a 30" diameter, 10" high collar of stone around the monument.

Place 6' tall galvanized post with "Property Boundary" and "Survey Monument" 4' N. of the corner.


From which:

A 8" Fir, bears S.11°E., 14.8', marked: C 1/4 S3 BT.

A 11" P. Pine, bears N.29°E., 16.3', marked: C 1/4 S3 BT.

Paint blazes and 6" band and posted "Bearing Tree" and "Land Survey Monument" on bearing trees.

See Certificate of Survey on file at the Lincoln County Courthouse.

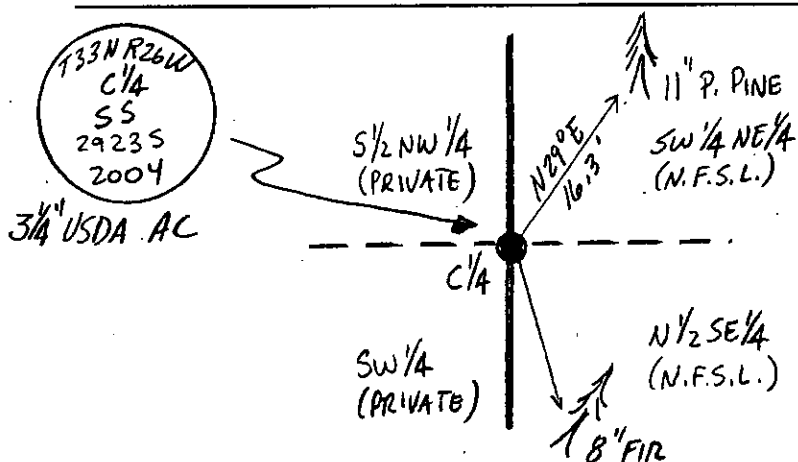

SKETCH OF CORNER

CERTIFICATION

I, Jason Culp
certify the information shown herein is true and correct.

Jason Culp
Signature Ground Party Chief

I, Richard A. Ainsworth
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act (70-22-101, et seq., M.C.A.)

Richard A. Ainsworth
Signature of Surveyor & Seal

Date: 7/2004

Reg. No. 2923

Employer: Professional Consultants, Inc.

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on 10-18-04

was noted on the cross-index plat and is assigned Page No. 179985, in

book No. 10666

page

Jeannie Denny

County Official

Sec.3

