

CERTIFIED CORNER RECORDATION

CORNER C-S 1/16 S 24 T. 33 N., R. 26 W., P.M.M. LINCOLN COUNTY

RECORD:
NONE

FOUND EVIDENCE:

2 inch aluminum Flathead Geomatics monument S 6° W 0.60 from computed position

PERPETUATION:


Set a 3 1/4 inch aluminum cap stamped (see diagram below) on a 5/8 inch dia. rebar 30 inches long.
From which

A 10 inch DBH Douglas Fir scribed T33N R26W C-S 1/16 S24 BT bears N 8° E 20.40 ft. dist.

A 10 inch DBH Lodgepole Pine scribed C-S 1/16 S24 BT bears N 72° E 32.04 ft. dist.

Painted 6 inch wide bands and attached bearing tree signs to trees.

MAGNETIC DECLINATION: 18° E

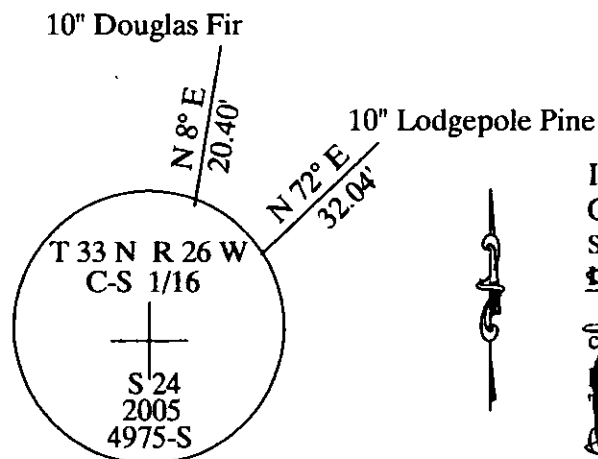

CERTIFICATION

I, GEORGE CLARK

Certify the information shown herein is true and correct

Signature of Ground Party Chief

KENNETH DAVIS

4975-S
I certify that this Corner Record correctly represents work performed here or under my direction in compliance with the

Corner Recordation Act

MS-21-101, et seq., M.C.A.

Signature of Surveyor & Seal

Date: 11/04/2005 Recd No. 4975-S

Employer: DAVIS SURVEYING INC

SKETCH OF CORNER

SECTION

Office of Clerk and Recorder, County of _____

This "corner record" was filed for record on _____

was noted on 189390 BOOK: CCR CC&R'S PAGE: 10865 Pages: 1

No. _____ STATE OF MONTANA LINCOLN COUNTY

In book No. _____ RECORDED: 11/04/2005 12:52 KOI: CC&R'S


CORAL M. CUMMINGS CLERK AND RECORDER

FEE: \$0.00

BY: George Clark

TO: DAVIS SURVEYING, INC.

Cross Index No. C-S 1/16 S 24 T. 33 N., R. 26 W., P.M.M.



Sec
24

THIS CORNER