INSTRUCTIONS

- 1. Original and/or subsequent record used to evaluate the corner position.
- 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
- Description of monument and accessories set to perpetuate the corner position.
 Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ites, position of accessories, etc.
- Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 Fill in Cross Index & Seciton Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

1 Corner Common To Sections 29528 T. 33N R. 26W P.M.M. Lincoln

Set Limestone, 12x12x8 ins., Bins. in the ground, marked GLO Record: "/4" ox West face, from which:

A 7" fir mkd. "1/4 S 29 BT" Bears N 60°W 52 1ks.

A 18" tamorack mkd. " 14 528 BT Bears N641/2" E 301ks.

Found limestone 10x12x12 ins., firmly set and mkd. "14" on BLM Record: West face, from which!

A 20" fir stump mkd. "/4 S 28 BT" bears NGB°E 301ks.

A 14" for mkd. "1/4 529 BT" bears NS7°W 52 Lks.


At the corner point, set an iron post, 30" long, 21/2" diam., 26" in the ground, in concrete, with brass cap mkd.

> T33N R26W 528 1961

From which:

A 5" fir mkd. "1/4 528 BT" bears NB3°E 23 1ks. 8" fir mkd. " 1/4 5 29 BT" bears N 31°W 38 1ks.

Found: Monument and accessories as described in above BLM record.

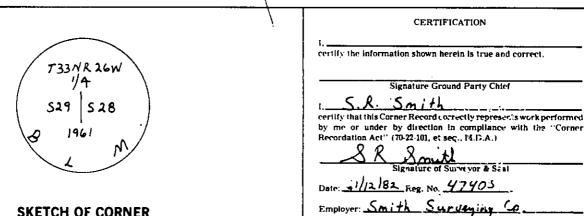

SKETCH OF CORNER

Office of Clerk and Recorder, County of Kincoln record" was filed for record on the March 30d _ day of 1962 was noted on the cross-index plat and is assigned page No. 1551 book No. \perp .

Eleanor Houghn by County Official

· corner this sheet

29828

T. 33N R. 26W PMM