

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner E 1/16 S26 S35 T. 33N R. 26W P.M.M. Lincoln County


There is no previous record of this corner having been set.

Set a 2 in x 30 in. Aluminium Pipe with a 3 1/2 in diameter  
Aluminium cap stamped as shown

From which

A 13" Tam. bears N11°E , 11.15 ft. scribed "E 1/16 S26 BT"

A 14" Tam. bears S26°E , 20.90 ft. scribed "E 1/16 S35 BT"

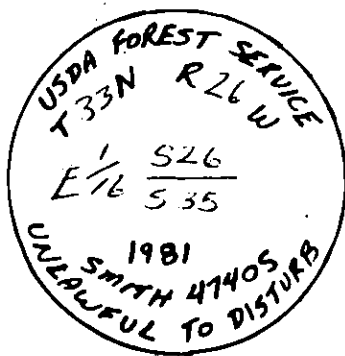

SKETCH OF CORNER

CERTIFICATION

I, Thomas Van Slyke  
certify the information shown herein as true and correct.

Thomas Van Slyke  
Signature Ground Party Chief

I, S.R. SMITH  
certify that this Corner Record correctly represents work performed  
by me or under my direction in compliance with the "Corner  
Recordation Act" (70-22-101, et seq., M.D.A.)

S.R. Smith  
Signature of Surveyor & Seal

Date: 2/19/82 Reg. No. 47405


Employer: SMITH SURVEYING CO.

Office of Clerk and Recorder, County of Lincoln. This "corner  
record" was filed for record on the July 28th day of 1982  
was noted on the cross-index plat and is assigned page No. 1782, in  
book No. \_\_\_\_\_

Eleanor L. Vaughn by Betty L. Conces  
County Official deputy

Cross Index No. V-20 T. 33N R. 26W P.M.M.

Sec. 26



• - corner this sheet

Sections 26, 27, & 35 T33N R26W