

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography (ies, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 33/34 S.C. T. 33N R. 26W P.M.M. LINCOLN County

RECORD: (G.L.O.) SET A SANDSTONE 18X6X6 ins., 12ins. in the ground for standard cor. of secs. 33 and 34, marked S C on N. with 3 grooves on E. and W. faces; from which

a pine 7 ins diam., bears N.65 1/4° E., 61 lks. dist., marked T 33 N R 26 W S 34 B T.



x A pine, 6 ins. diam., bears N. 24° W., 33 lks. dist., marked T 33 N R 26 W S 33 BT

RECORD: (B.L.M.) The standard corner of secs. 33 and 34, monumented with a sandstone 6x14x14 ins., firmly set in the ground and mkd. with 3 notches on the E. and W. faces and SC on the N. face.

from which an original bearing tree:
A pine snag 7 ins. diam., bears N. 65 1/4° E., 61 lks. dist., mkd. T33N R26W S34 BT.
At the corner point set an iron post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground in concrete, with brass cap mkd.

From which
A spruce, 7 ins. diam., bears N. 38° E., 49 lks. dist., mkd. T33N R 26 E S34 SC BT.
A spruce, 6 ins. diam., bears N. 79 1/2° W., 51 lks. dist., mkd. T33N R26W S34 S6 BT.
Bury the original stone alongside the iron post.
Set a wooden post, 6' long, 5 ins. diam., in the ground alongside the iron post.

FOUND: A B.L.M. brass cap as described above.
from which
A 5" diam. live spruce, bears N.76° W. 33.22', scribing visable.
A 9" diam. stump bears N41° E, 32.25' dist., scribing visable.
SET: A 16" diam. live spruce bears N83° E 19.03', scribed S34 BT

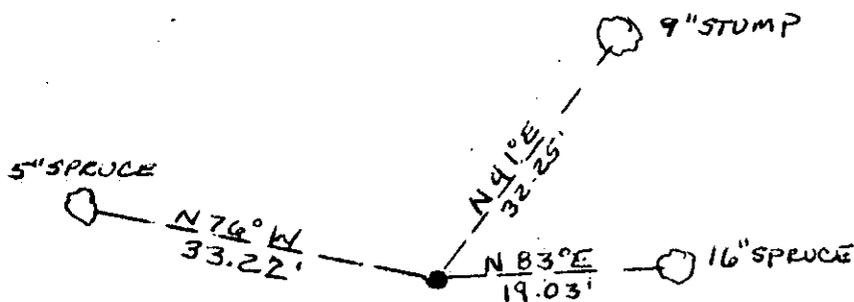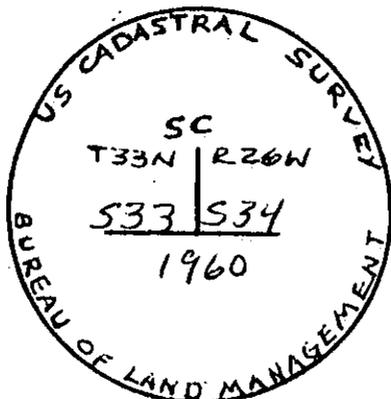

SKETCH OF CORNER

CERTIFICATION
JAMES W. REED
certify the information shown herein is true and correct.
James W. Reed
Signature Ground Party Chief
THOMAS C. HILL
certify that this Corner Record correctly represents work performed by me or under by direction in compliance with the "Corner Recordation Act" (10-22-101, et seq., M.D.A.)
Thomas C. Hill
Signature of Surveyor & Seal
5612S
Date: 8/12/82 Reg. No. _____
Employer: USFS

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the OCT. 21 day of 1982 was noted on the cross-index plat and is assigned page No. 2021, in book No. _____

Eleanor L. Vaughn by Betty L. Conas
County Official deputy

Sec. 33
