INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 to Secs. 13 & 24 T. 33N R. 26W P.M.M. Lincoln County

Record:

The 1/4 sec. cor. of secs. 13 & 24, monumented with a limestone, 8 x 10 x 14 ins., loosely set & marked 1/4 on the North face from which the original bearing trees:

A larch, 14" diam., bears N. 2 1/2° E. 40 lks dist., with scribing overgrown. (record)

A larch stump, 12" diam bears S. 20° E., 53 lks. dist., marked 4 S24 BT. (Record: S. 16° E., 53 lks. dist.)

At the corner point

Set an iron post 30" long, 2 1/2" diam, 26 ins. in the ground in concrete with brass cap marked: T33N R26W

1/4 S13/S24

1960

from which:

A fir 9" diam. bears S. 44° W. 43 lks. dist. marked 1/4 S24 BT

A fir 8" diam. bears N. 5 1/4° E. 58 lks dist. marked 1/4 S13 BT

Bury the original stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, North of the iron post.

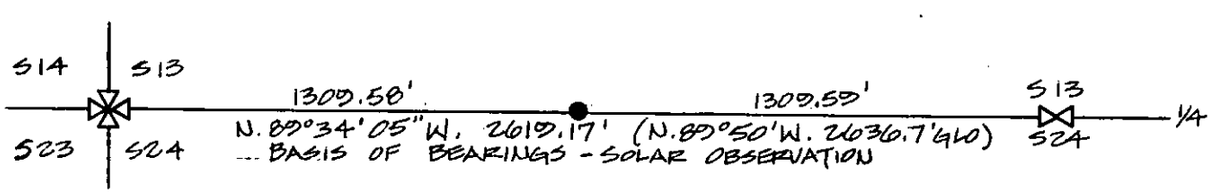

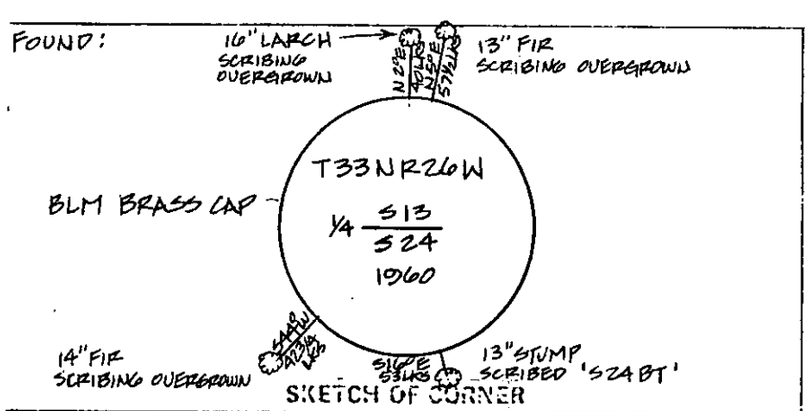

CERTIFICATION

I, S. R. Smith, certify the information shown hereon is true and correct.

S R Smith
Signature Ground Party Chief

I, S. R. Smith, certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act (70-22-101 et seq., M.C.A.)

S R Smith
Signature of Surveyor & Seal

Date 9/28/82 Reg. No. 4740S

Employed Marquardt Surveying

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the NOV. 9 day of 1982 was noted on the cross-index plat and is assigned page No. 2044, in book No. _____

Eleanor L. Vaughn by Betty L. Conas deputy
County Official

Cross Index No. N-23 T. 33N R. 26W P.M.M.

Sec. 13 T33N R26W

⊙ - corner this sheet

2044

FOUND : BLM BRASS CAP

FROM WHICH :
A 16" LARCH (G.L.O.) BEARS N. 2° E. 40 LKS, SCRIBING OVERGROWN
A 13" FIR (B.L.M.) BEARS N. 5° E. 57½ LKS, " "
A 14" FIR (B.L.M.) BEARS S. 44° W. 42¾ LKS, " "
A 13" STUMP (G.L.O.) BEARS S. 16° E. 53 LKS, - SCRIBING VISIBLE - '524 BT'