

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner 1/4 SEC. 32 & SEC. 33 T. 33 N R. 27 W P.M.M. LINCOLN County

1. RECORD: ORIGINAL 1911 SET A SLATE STONE 16x12x4 INS. 11 INS. IN THE GROUND FOR THE 1/4 SEC. COR. MARKED 1/4 ON WEST FACE, FROM WHICH:

A TAM. 12" DIAM. BEARS N 70° E 16 LKS. DIST. MARKED 1/4 S 33 BT.

A FIR 6" DIAM. BEARS S 85° W 20 LKS. DIST. MARKED 1/4 S 32 BT.

RESURVEY 1961 SET A IRON POST 30" LONG 2 1/2" DIAM. 26" IN THE GROUND, WITH BRASS CAP MARKED.

T33N R27W  
1/4  
S 32 | S 33  
1961

FROM WHICH:

A SPRUCE 6" DIAM. BEARS N 52° E 56 LKS. DIST. MARKED 1/4 S 33 BT


A LARCH 12" DIAM. BEARS N 61° W 58 LKS. DIST. MARKED 1/4 S 32 BT.

2. FOUND: BRASS CAP IN CLEAR CUT AREA, NO EVIDENCE OF BT'S.

3. ACCESSORIES: A LODGEPOLE 3" DIAM. BEARS S 88° W 31.20 FT. DIST. MARKED 1/4 S BT.

A PINE 4" DIAM. BEARS S 25° W 36.20 FT. DIST. MARKED 1/4 S BT.

A 6 FT. STEEL POST WITH BT SIGN'S AND LAND SURVEY MONUMENT SIGN'S ATTACHED, BEARS S 22° E 3.0 FT. DIST.

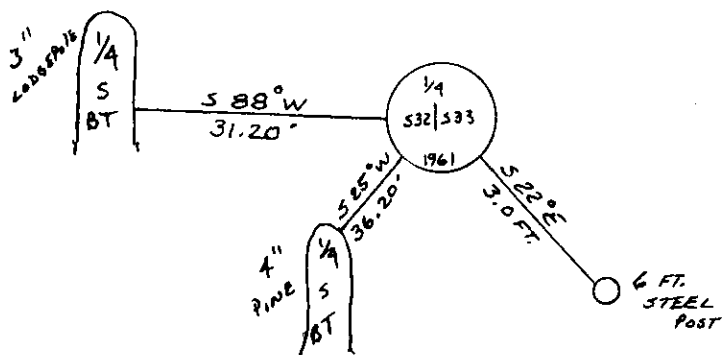

SKETCH OF CORNER

## CERTIFICATION

DANIEL J. CROFT

I, DANIEL J. CROFT, certify the information shown herein is true and correct.

GENE WARTEN Signature Ground Party Chief

I, GENE WARTEN, certify that this corner record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.).

2734 S Registered State of Montana Seal


Date: 11-88 Registered State of Montana Seal

Employer: ROCKY MOUNTAIN SURVEYORS

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Feb 24 day of 1987 was noted on the cross-index plat and is assigned page No. 3522, in book No.       

Cross Index No. X-9 T. 33 N R. 27 W P.M.M.

Sec. 33 T33N R27W



• - corner this sheet