

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 SEC. 33 T. 33N R. 27W P.M.M. LINCOLN County

1. RECORD: ORIGINAL 1903 SET A SLATE STONE 28x10x5 INS. 21" IN THE GROUND, FOR STANDARD 1/4 SEC. COR. MARKED S C 1/4 ON NORTH FACE. FROM WHICH:

A TAM. 3" DIAM. BEARS N 45 W 8 LKS. DIST.
MARKED S C 1/4 S 33 BT.

A TAM. 3" DIAM. BEARS N 20 30' E 9 LKS. DIST.
MARKED S C 1/4 S 33 BT.


2. FOUND: FOUND STONE 28x10x5 WITH S C 1/4 ON NORTH FACE, UNDISTURBED ALSO FOUND BEARING TREES NOW 8" & 6" DIAM. SCRIBING OVERGROWN.

3. ACCESSORIES: SET 24x3 INS. ALUM. MONUMENT IN PLACE OF STONE BURIED ALONG SIDE OF MONUMENT. MONUMENT IS SET 18" IN THE GROUND WITH A COLLAR OF STONE. MAINTAINED BEARING TREES WITH SIGN'S AND PAINT, ALSO SET A 6' STEEL POST APPROX. 3.0' WEST OF MONUMENT.

MONUMENT STAMPED: T33N R27W

S 33 1/4

WARREN 1986 2734S

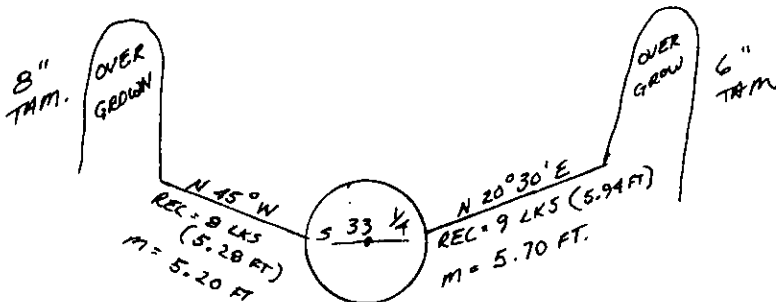

SKETCH OF CORNER

CERTIFICATION

I, DANIEL J. CROFT

certify the information shown herein is true and correct.

Daniel J. Croft
Signature Ground Party Chief

I, GENE WARREN
certify that this corner record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.).

Gene Warren
Signature Registered Surveyor & Seal


Date: 11-8-86 10:12 AM

Employer: ROCKY MOUNTAIN SURVEYORS

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Feb 24 day of 1987 was noted on the cross-index plat and is assigned page No. 3523 in book No.

Cross Index No. Z-11 T. 33N R. 27W P.M.M.

Sec. 33 T33N R27W



• - corner this sheet