

CERTIFIED CORNER RECORDATION

Corner S 1/4 Corner Section 4 T. 33 N. R. 26 W. P.M.M. Lincoln County

1903 Original GLO record by Abraham L. Rinearson and Gordon C. Smith

"Set a quartzite stone, 18 x 10 x 8 ins 12 ins. in the ground, for 1/4 sec. cor., marked 1/4 on N. face; from which

A fir, 9 ins. diam., bears South 46 lks. dist., marked 1/4 S 9 B T

A pine, 9 ins. diam., bears N. 16° W., 36 lks. dist., marked 1/4 S 4 B T"

1961 BLM Remonumentation by William E. Stephens and David R. Cunningham:

"The 1/4 sec. cor. of secs. 4 and 9, monumented with a quartzite stone, 8x10x16 ins., loosely set in the ground and mkd. 1/4 on the N. face.

from which the original bearing trees:

A fir, 14 ins. diam., bears S. 1/4° E., 46 lks. dist., with scribing overgrown. (Record: SOUTH, 46 lks. dist.)

A pine, 10 ins. diam., bears N. 13 1/4° W., 37 lks. dist., mkd. 1/4 S4 BT. (Record: N. 13 1/4° W., 36 lks. dist.)

At the corner point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in concrete, with brass cap mkd.

T33N R26W

1 S4
4 S9

1961

from which

A fir, 5 ins. diam., bears N. 7 3/4° E., 30 lks. dist., mdk. 1/4 S4 BT.

A fir, 6 ins. diam., bears S. 48° W., 40 lks. dist., mkd. 1/4 S9 BT.

Bury the original stone alongside the iron post.

Set a wooden post, 6 ft. long, 6 ins. diam., in the ground alongside the iron post.

Collar of stone around the iron post.

1991 Rehabilitation

Found an iron post, 2 1/2 ins. diam., in a collar of stone, with 3 1/4 ins. diam. BLM brass cap mkd. as shown, with rotted, squared post with axe marks laying alongside, from which

A fir, 11 ins. diam., bears N. 9° E., 19.7 ft. dist., with overgrown blaze.

A fir, 17 ins. diam., bears S. 3° E., 29.8 ft. dist., with overgrown blaze.


A douglas fir, 11 ins. diam., bears S. 49° W., 25.9 ft. dist., with overgrown blaze.

A fir snag, 13 ins. diam., bears N. 11° W., 24.3 ft. dist., mkd. 1/4 S 4 BT.

Painted 6 ins. red bands and painted blazes red on BT's. Hung Land Survey Monument signs on BT's.

Measurements were made with a Silva hand compass (declination 19° E.) and a steel tape to the center of the root crowns of all trees. Distances are horizontal.

See Certificate of Survey No. 1870, filed in conjunction with this Corner Recordation, for ties to adjacent controlling corners.

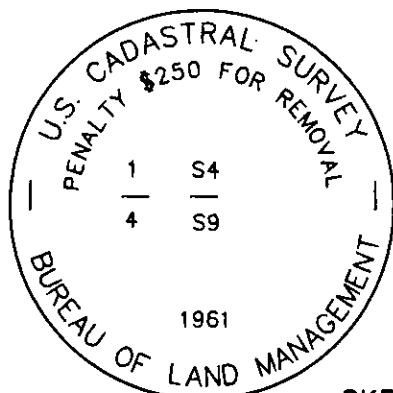

SKETCH OF CORNER

CERTIFICATION

I, Jane L. Eby
certify the information shown herein is true and correct.

Jane L. Eby
Signature Ground Party Chief

I, S. R. Smith
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

S R Smith
Signature of Surveyor & Seal

Date: 9/30/91 Reg. No. 4740S

Employer: Apogee, P.C.


Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Oct 16 day of 1991 was noted on the cross-index plat and is assigned page No. 4582 A, in book No. Coral M Cummings by Bill Bruckhoff

County Official

Cross Index No. E-11 T. 33N. R. 26W. PMM

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

Sec. 4



• corner this sheet

CRMCC3.dwg