

CERTIFIED CORNER RECORDATION

Corner NW Corner Section 4 T. 33N R. 26W P.M.M. Lincoln County

1894 Original GLO record by Frank L. Sizer and Abram L. Jaqueth:

"Set a post 4 ft. long, 4 ins. square, 24 ins. in the ground, for Cor. to Secs. 4, 5, 32 & 33 marked
T. 34 N. S. 33 on N.E.
T. 33 N. S. 4 on S. E.
R. 26 W. S. 5 on S.W. and
S. 32 on N.W. faces, with 4 notches on E and 2 notches on W edges; from which
A fir 12 ins. diam. bears N. 70°30' E. 22 lks. dist. marked T. 34 N. R. 26 W. S. 33 B.T.
A fir 6 ins. diam. bears S. 73°45' E. 10 lks. dist. marked T. 33 N. R. 26 W. S. 4 B.T.
A fir 10 ins. diam. bears S. 51°40' W. 22 lks. dist. marked T. 33 N. R. 26 W. S. 5 B.T.
A fir 14 ins. diam. bears N. 43°45' W. 18 lks. dist. marked T. 34 N. R. 26 W. S. 32 B.T."

1961 BLM Remonumentation by William E. Stephens and David R. Cunningham:

"The cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., as determined from the remains of the original bearing trees.
At the corner point
Set an iron post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in concrete, with brass cap mkd.

T34N R26W
S32 | S33
S 5 | S 4
T33N
1960

from which

The remains of the original bearing trees:

A dead fir, 10 ins. diam., bears S. 73 3/4° E., 10 lks. dist., mkd. T33N R26W S4 BT. (Record)
A dead fir, 11 ins. diam., bears S. 51 3/4° W., 22 lks. dist., mkd. T33N R26W S5 BT. (Record: S. 51° 40' W., 22 lks.)

The new bearing trees:

A fir, 9 ins. diam., bears N. 29 1/2° E., 165 lks. dist., mkd. T34N R26W S33 BT.
A fir, 9 ins. diam., bears S. 18° E., 65 lks. dist., mkd. T33N R26W S4 BT.
A fir, 5 ins. diam., bears S. 46° W., 45 lks. dist., mkd. T33N R26W S5 BT.
A fir, 10 ins. diam., bears N. 78° W., 73 lks. dist., mkd. T34N R26W S32 BT.


Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the iron post"

1982 Maintenance by S. R. Smith

"Found: Corner and SW & NW BLM B.T.'s
A 5" Tamarack B.T. bears N9°E 12.4' [Set]
A 4" Fir B.T. bears S51°E 18.5" [Set]

1991 Maintenance by S. R. Smith

Found monument and accessories as per 1982 Maintenance.
Painted 6 ins. red bands and painted blazes red on BT's. Hung Land Survey Monument signs on BT's.
Measurements were made with a Silva hand compass (declination 19° E.) and a steel tape to the center of the root crowns of all trees. Distances are horizontal.

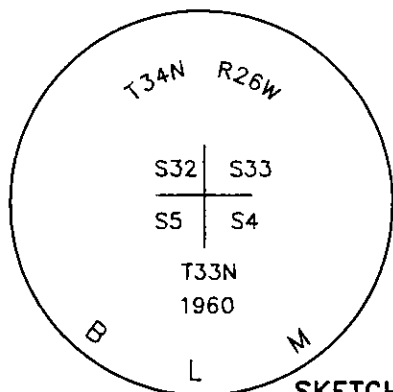

SKETCH OF CORNER

CERTIFICATION

I, S. R. Smith
certify the information shown herein is true and correct.
S. R. Smith
Signature Ground Party Chief
I, S. R. Smith
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)
S. R. Smith
Signature of Surveyor & Seal
Date: 9/30/91 Reg. No. 4740S
Employer: Apogee, P.C.


Office of Clerk and Recorder, County of Lincoln This "corner record" was filed for record on Oct 16, 1991

was noted on the cross-index plot and is assigned page No. 4583 A in book No. Coral M Cummings by Bill Buckhoff

County Official

Z-9 34N. 26W.
Cross Index No. A-9 T. 33N. R. 26W. PMM

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

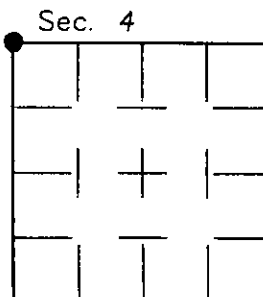

• corner this sheet

CRMCC4.dwg