

CERTIFIED CORNER RECORDATION

Corner SW Corner Section 4 T. 33N R. 26W P.M.M. Lincoln County

1903 Original GLO record by Abraham L. Rinearson and Gordon C. Smith:

"Set a limestone, 15 x 10 x 8 ins., 10 ins. in the ground, for cor. of secs. 4, 5, 8 and 9, marked with 5 notches on S. and 4 notches on E. edge; from which
A tamarack, 6 ins. dia., bears N. 40° E., 35 lks. dist., marked T 33 N R 26 W S 4 B T.
A tamarack, 10 ins. dia., bears S. 21° E., 37 lks. dist., marked T 33 N R 26 W S 9 B T.
A pine, 8 ins. dia., bears S. 44° W., 11 lks. dist., marked T 33 N R 26 W S 8 B T.
A pine, 10 ins. dia., bears N. 78° W., 12 lks. dist., marked T 33 N R 26 W S 5 B T."

1961 BLM Remonumentation by William E. Stephens and David R. Cunningham:

"The cor. of secs. 4, 5, 8 and 9, monumented with a limestone, 8x10x16 ins., firmly set in the ground and mkd. with 5 notches on the S. and 4 notches on the E. from which the original bearing trees:
A larch, 14 ins. diam., bears S. 21° E., 37 lks. dist., with scribing overgrown. (Record)
A pine, blown down, 10 ins. diam., bears S. 44° W., 11 lks. dist., mkd. T33N R26W S8 BT. (Record)
A pine, blown down, 10 ins. diam., bears N. 78° W., 12 lks. dist., mkd. T33N R26W S5 BT. (Record)

At the corner point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, in concrete and supported in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T33N	R26W
S5	S4
S8	S9
1961	

from which

A fir, 6 ins. diam., bears N. 65 1/2° E., 12 lks. dist., mkd. T33N R26W S4 BT.
A larch, 10 ins. diam., bears S. 64° E., 109 lks. dist., mkd. T33N R26W S9 BT.
A fir, 4 ins. diam., bears S. 75° W., 11 lks. dist., mkd. X BT.
A larch, 8 ins. diam., bears N. 63 1/2° W., 42 lks. dist., mkd. T33N R26W S5 BT.
bury the original stone alongside the iron post."

1991 Rehabilitation

Found an iron post, 2 1/2 ins. diam., in a mound of stone, 4 ft. base, 2 ft. high, with 3 1/4 ins. diam. BLM brass cap, mkd. as shown:


from which

A grand fir, 9 ins. diam., bears N. 65° E., 7.9 ft. dist., visibly mkd. T33N R26W S4 B.
A larch, 15 ins. diam., bears S. 14° E., 24.5 ft. dist., with overgrown blaze.
A pine, blown down, bears S. 44° W., 7.5 ft. dist., mkd. T33N R26 W S8 BT.
A grand fir, 5 ins. diam., bears S. 75° W., 7.5 ft. dist., mkd. x BT.
A fir, 8 ins. diam., bears N. 64° W., 28.2 ft. dist., with overgrown blaze.

Painted 6 ins. red bands and painted blazes red on BT's. Hung Land Survey Monument signs on BT's. Set 6 ft. long galv. steel guard post with Land Survey Monument decal attached 2 ft. E. of monument.

Measurements were made with a Silva hand compass (declination 19° E.) and a steel tape to the center of the root crowns of all trees. Distances are horizontal.

See Certificate of Survey No. 1870, filed in conjunction with this Corner Recordation, for ties to adjacent corners.

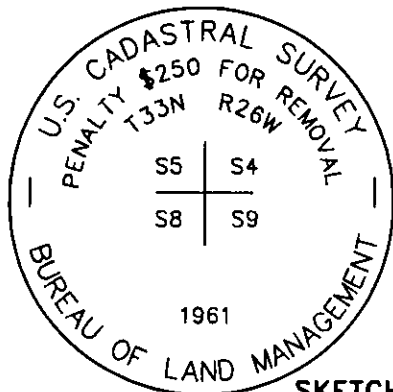

SKETCH OF CORNER

CERTIFICATION

I, Jane L. Eby
certify the information shown herein is true and correct.

Jane L. Eby
Signature Grantee Party Chief
S. R. Smith

I, S. R. Smith
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

S. R. Smith
Signature of Surveyor & Seal

Date: 9/30/91 Reg. No. 4740S

Employer: Apogee, P.C.

Office of Clerk and Recorder, County of Lincoln. This "corner

record" was filed for record on Nov. 5, 1991


was noted on the cross-index plat and is assigned page No. 4585-A, in

book No. Coral M. Cummings by Bill Bruckhoff
County Official

Cross Index No. E-9 T. 33N R. 26W P.M.M.

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

Sec. 4

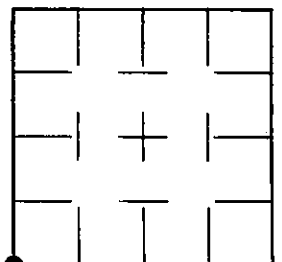

• corner this sheet

CRMCC2.dwg