INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 SEC. 6 T. 32 N R. 27W P.M.M. LINCOLN County

ORIGINAL 1929:

1. RECORD: SET A IRON POST 3 FT. LONG 1 INCH DIAM. 28 INS. IN THE GROUND, FOR THE 1/4 SEC. COR. OF SEC. 6 ONLY, WITH BRASS CAP MARKED:

1/4 S 6
1929

FROM WHICH: A TAMARACK 6" DIAM. BEARS S 8° 15 E 36 LKS. DIST. MARKED 1/4 S 6 BT

A PINE 8" DIAM. BEARS S 50° 15 W 55 LKS. DIST. MARKED 1/4 S 6 BT

2. FOUND: 1" BRASS CAP ORIGINAL 6" TAM. (NOW 10".) NO EVIDENCE OF OTHER BT.

3. ACCESSORIES: A 12" TAMARACK BEARS S 35° W 15.20 FT. DIST. MARKED 1/4 S 6 BT. MAINTAINED ORIGINAL BT WITH SIGNS AND PAINT, ALSO SET A 6 FT. STEEL POST APPROX. 3 FT. FROM MONUMENT.

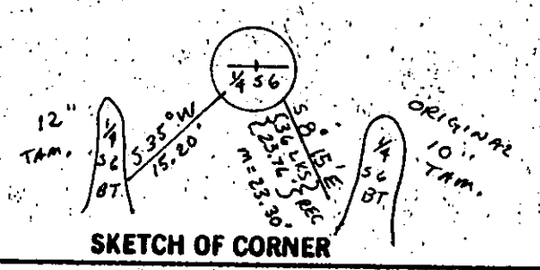

SKETCH OF CORNER

CERTIFICATION

I, DANIEL J. CROFT certify the information shown herein is true and correct.

Signature of Ground Party Chief

I, H. GENE WARREN * certify that this Corner Record correctly represents work performed by me or under by direction in compliance with the "Corner Recordation Act" (70-22-101, et seq. M.C.A.)

Signature of Surveyor & Seal

Date: 11/86 Reg. No. 2734 S

Employer: ROCKY MOUNTAIN SURVEYORS

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the 30 day of Jan 1987 was noted on the cross-index plat and is assigned page No. 35(14), in book No. _____

County Official Deputy

Cross Index No. A-3 T. 32N R. 27W PMM

Sec. 6 T32N R27W

● - corner this sheet