

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner W 1/4 CORNER SECTION 16 T. 32 N. R. 28 W. P.M.M. LINCOLN County

- I. 1903 Original GLO record by George Fessenden and Banney Lyman: "Set a slate stone, 12 x 8 x 6 ins., 8 ins. in the ground, for 1/4 sec. cor., marked 1/4 on W. face; from which" marked and scribed 2 BTs.


1975 BLM Remonumentation by Joseph French: "The 1/4 sec. cor. of secs. 16 and 17, determined from the remains of the original bearing trees:

A pine stump, 14 ins. diam., bears N. 43° E., 8 lks. dist., with the bottom portion of a blaze visible.

A pine, 24 ins. diam., bears N. $17\ 1/2^{\circ}$ W., 13 lks. dist., mkd. 1/4 S17 BT.

At the corner point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



from which a new bearing tree:

A spruce, 10 ins. diam., bears S. 55° E., 36 lks. dist., mkd. 1/4 S16 BT.

raise a flat mound of stone, 2 1/2 ft. diam., around the iron post."

- II. Found an iron pipe, 2 1/2 in. diam., 4 ins. above the ground, in a collar of stone, with a 3 1/4 in. diam. BLM brass cap mkd. as shown above, from which:


A root crown, bears N. 43° E., 6.0 ft. dist., no scribing visible.

An uprooted spruce, 12 ins. diam., bears S. 55° E., 24.0 ft. dist., scribed 1/4 B

A larch (record pine), 23 ins. diam., bears N. 17° W., 8.3 ft. dist., scribing visible.

- III. Set a galvanized steel guard post with a Survey Marker decal attached, 3.0 ft. east of the monument. Painted red bands around the bearing trees and attached BT and Land Survey Monument signs. Marked and scribed one new bearing tree:

A douglas fir, 23 ins. diam., bears N. 80° E., 71.7 ft. dist., scribed 1/4 S16 BT.

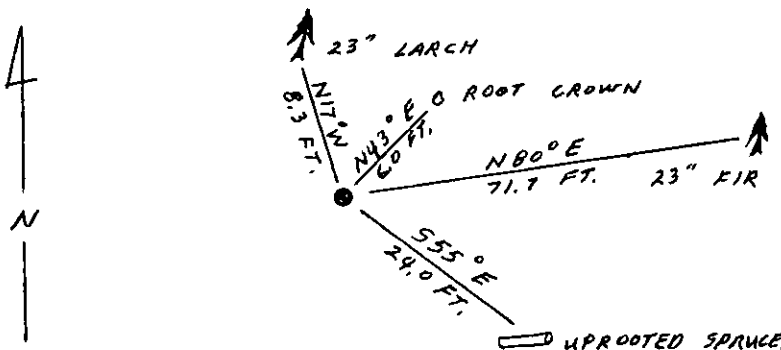

SKETCH OF CORNER

CERTIFICATION

I, Gary C. Crismon
certify the information shown herein is true and correct.

Gary C. Crismon
Signature Ground Party Chief

I, Alvah F. Hughes
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes
Signature of Surveyor & Seal

Date: 5/2/89 Reg. No. 7322-S

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Dec 19, 1989

was noted on the cross-index plat and is assigned page No. 4170, in

book No. _____

Cross Index No. L-9 T. 32 N R. 28 W P.M.M.

