
## INSTRUCTIONS

- Original and/or subsequent record used to evaluate the corner position.
- 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated
- Description of monument and accessories set to perpetuate the corner position.
- 6. Securition is informal and accessories set to perpetuate the corner position.
  4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
  5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
  6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

T. \_\_\_\_\_\_ R. \_\_\_\_\_ P.M.M. CEW 1/64 Sec. 29 Corner . County

- No previous record
- No evidence on the ground
- III. At the determined corner position by survey, set a 3/4 ins. dia. aluminum rod. 30 ins. long. 27 ins. in the ground with attached 3 1/4 ins. dia., U.S.D.A. Forest Service aluminum cap, marked as shown:



Placed a small rock collar around monument.

from which

A douglas fir, 10 ins. dia., bears N78  $\stackrel{\circ}{\text{E}}$ , 17.2 ft., mkd. C-E-W 1/64 S29 BT. A douglas fir. 12 ins. dia., bears N44 w, 10.4 ft., mkd. C-E-W 1/64 S29 BT.


Set a guard post, with a "Survey Marker" and "Property Boundary" decals attached, 3 ft. W. from corner.

Painted a red band around each bearing tree and attached "Land Survey Monument" and "Bearing Tree" signs where needed.

Magnetic Declination: East, 19



· - corner this sheet

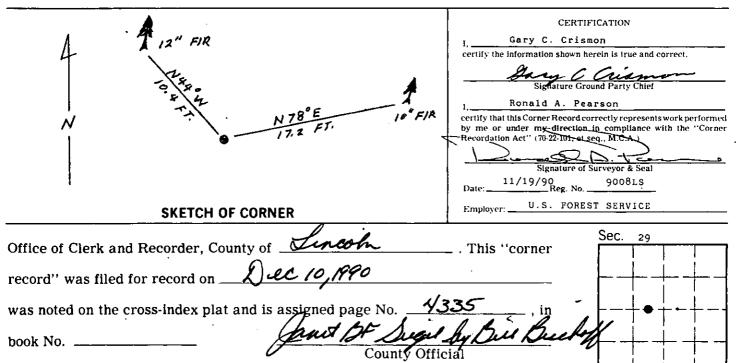

Cross Index No. .