

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 Cor. of Secs. 29 & 32 T. 32 N. R. 28 W. P.M.M. Lincoln County

- I. 1911 original G.L.O. record by William C. Perkins: "Set a sandstone, 18 x 12 x 8 ins., 14 ins. in the ground, for 1/4 sec. cor., marked 1/4 on N. face; from which

A tamarack, 8 ins. in diam., bears S6° E, 16 lks. dist., marked 1/4 S32 BT.


A tamarack, 8 ins. in diam., bears N49° W, 54 lks. dist., marked 1/4 S29 BT."

- II. Found a sandstone 18 x 13 x 8 ins., 13 ins. in the ground, marked 1/4 on N. face, from which

A larch snag, bears S5° E, 10.3 ft. (16 lks.) dist., mkd. 3.

A downed larch, 7 ins. diam., bears N50° W, 36.2 ft. (55 lks.) dist., mkd. 4 BT.

- III. At the corner point; set a 2 1/2 ins. diam. aluminum pipe, 30 ins. long, 24 ins. in the ground with attached 3 1/4 ins. diam., U.S.D.A. Forest Service aluminum cap marked as shown:



Establish two new bearing trees:



A larch, 15 ins. diam., bears N6° E, 12.9 ft. dist., mkd. 1/4 S29 BT.

A larch, 10 ins. diam., bears S52° E, 32.5 ft. dist., mkd. 1/4 S32 BT.

Painted a red band around each bearing tree and attached "Land Survey Monument" and "Bearing Tree" signs where needed.

Set a guard post, with a "Survey Marker" decal attached, 3 ft. N. from corner.

Magnetic Declination: East, 19°

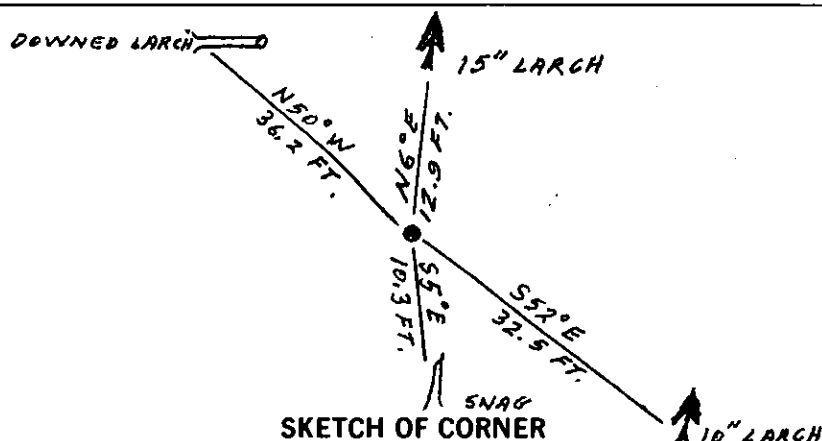

CERTIFICATION

I, Raymond Pederson
certify the information shown herein is true and correct.

Raymond Pederson
Signature Ground Party Chief

I, Ronald A. Pearson
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Ronald A. Pearson
Signature of Surveyor & Seal

Date: 11/26/90 Reg. No. 9008LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner

record" was filed for record on Dec 10, 1990


was noted on the cross-index plat and is assigned page No. 4360, in

book No. _____

Janet H. Sugil by Bill Bull
County Official

Cross Index No. V 7 T. 32 N R. 28 W P.M.M.

Sec. 29



• - corner this sheet