# CERTIFIED CORNER RECORDATION

Corner __CE 1/16 cor. of Sec. 22__ T __32 N.__ R. __29 W .__ P.M.M. __LINCOLN__ County

I. **Record:** No previous record.

II. **Found:** No evidence found during a field search of area.

III. **Perpetuation:** At the calculated position from survey, set a 3 1/4 in. diam. U.S. Forest Service aluminum cap on a 5/8 in. diameter x 24 ins. long rebar, 21 ins. in the ground. Raise a collar of stone to the top, marked as shown.

```
        T32N R29W

         CE 1/16
      C ——————— C
          S22

        7322 LS
          2005
```

From which:

71° 26.50

A fir, 9 1/2 ins. diam., bears S.73°E., 20.40 ft. dist., scribed CE 1/16 S22 BT.
A fir, 20 ins. diam., bears S.55°W., 21.5 ft. dist., scribed CE 1/16 S22 BT.

45° 17½

Set a 6 ft. galvanized steel post 3 ft. north of corner and attached Land Survey Monument and Property Boundary decals.

Painted 6 in. wide red bands around all bearing trees and attached new Bearing Tree and Land Survey Monument signs on back of all bearing trees.
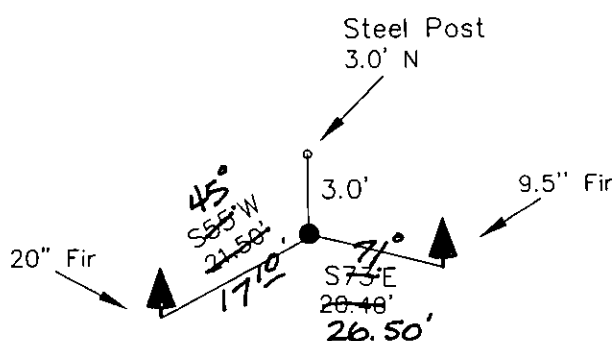
Magnetic declination: 18°East

Equipment used: Hand compass and loggers tape

Kootenai Surveyors Inc., 314 California Av., Libby, MT. 59923 (406) 293-4354

Greased Lightening - PCTC

Steel Post
3.0' N

3.0'

9.5" Fir

20" Fir

45°
S55°W
21.50'

71°
S73°E
20.40'
26.50'

17½'

SKETCH OF CORNER

CERTIFICATION

I, __Peter Landis__ certify the information shown herein is true and correct.

[signature]
Signature Ground Party Chief

I, __Alvah F. Hughes__ certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

[signature]
Signature of Surveyor & Seal

Date: __6/27/05__ Reg. No. __7322-LS__

Kootenai Surveyors Inc.

Employer: _____

Sec. 22

· corner this sheet

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors