

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 of Secs. 29 and 32 T. 32 N. R. 31 W. P.M.M. Lincoln County


I. 1901, G.L.O. original record by Abram L. Jaqueth: Set a stone monument, marked a pine and tamarack for bearing trees.

1972, B.L.M. remonumentation record by Joseph E. French: "The 1/4 sec. cor. of secs. 29 and 32, as determined from the remains of the original bearing trees:

A larch stump, 10 ins. diam., bears S64°W, 64 lks. dist., mkd. 1/4 S32 BT. (Record: S58°W)
A pine stump, 16 ins. diam., bears N58°W, 21 lks. dist., mkd. 1/4 S29 BT. (Record: N64°W)

At the corner point:

set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



from which new bearing trees:

A fir, 9 ins. diam., bears S48°W, 32 lks. dist., mkd. 1/4 S32 BT.
A fir, 7 ins. diam., bears N83°W, 13 lks. dist., mkd. 1/4 S29 BT.

Raise a flat mound of stone, 3 ft. base, around the iron post."


II. Found, a 3 1/4 ins. diam., B.L.M. brass cap, marked as shown above, on a 2 1/2 ins. diam., iron pipe, 6 ins. out of the ground, from which

A douglas fir, 11 ins. diam., bears S48°W, 21.1 ft. (32 lks.) dist., scribe marks pitched over. (B.L.M. record)
A saw stump, 3 ft. high by 20 ins. diam., bears S66°W, 41.4 ft. (62.7 lks.) dist., mkd. S4 (G.L.O. record)
A saw stump, 3 ft. high by 11 ins. diam., bears N54°W, 13.6 ft. (20.6 lks.) dist., mkd. BT (G.L.O. record: N64°W, 21 lks.)
A douglas fir, 10 ins. diam., bears N80°W, 8.5 ft. (12.9 lks.) dist., scribe marks pitched over. (B.L.M. record)

III. Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, South, 3 ft.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs where needed.

Magnetic Declination: East, 19°

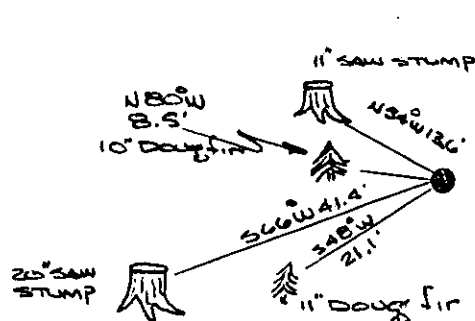

SKETCH OF CORNER

CERTIFICATION
Gary C. Crismqn
I, _____ certify the information shown herein is true and correct.
Signature Ground Party Chief
Ronald A. Pearson
I, _____ certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-105 et seq., M.C.A.)
Signature of Surveyor & Seal
Date: 7/9/90 Reg. No. 9008LS
Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Nov 8, 1990 was noted on the cross-index plat and is assigned page No. 4295 in book No. _____

Cross Index No. _____ T. _____ R. _____ PMM

