

CERTIFIED LAND CORNER RECORDATION

(REFERENCE FSM 7153.53)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)**Original record:**

Set a limestone 12x10x8 ins., 8 ins. in the ground, for 1/4 sec. cor., marked 1/4 on W. face; from which a tamarack 14 ins. diam. bears S.76°E. 91 lks. dist. marked 1/4 S.27 B.T.; a tamarack 16 ins. diam. bears S.22°45'W. 110 lks. marked 1/4 S.28 B.T.

Corner Evidence Found:

Found Larch (dead and down) 16 ins. dia. w/ axe blaze 4 ft. from base, scribing in advanced stage of decay but could make out "1/4 S28 B", a stump 3 ft. dist. approx. 16 in. dia. appears to be the original location of this B.T.;
 Found Larch (dead and down) 14 ins. dia. with axe blaze, also scribed "1/4 S27 B T", stump was 17 ins. dia. at 3 ft. high and in advanced stage of decay.
 The original corner was not found and assumed lost. The soil in this area being very mucky and at the edge of a swamp.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: Sept. 4, 1975

Established corner by intersecting G.L.O. record distances of 91 lks. to a tamarack BT 14 ins. and 110 lks. to a tamarack BT 16 ins;
 Set a 3 ins. dia. creosoted Lodgepole pine post and mound of rock 1 ft. high and 1 ft. dia. around the base of the post from which a
 12 ins. Douglas Fir bears S79°30'W, 96.5 lks, scribed 1/4 S28 RP;
 a 8 ins. Douglas Fir bears N83°E, 89 lks., scribed 1/4 S27 RP;
 a 17 ins. Larch stump (original B.T.) bears S79°E, 91 lks.;
 a 16 ins. Larch stump (original B.T.) bears S15°W, 110 lks.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

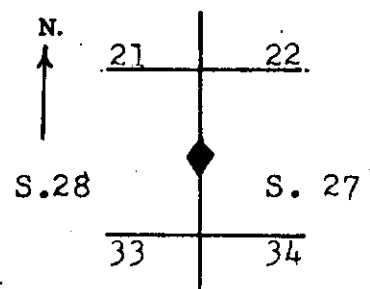
Surveyor's Seal

I, Jerry P. Okonski
 certify that the information shown herein is true and correct.

Jerry P. Okonski
 Signature of Ground Party Chief

I, Robert F. Burdick
 certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Robert F. Burdick
 Signature of Surveyor

DIAGRAM OF CORNER:

◆ = Corner recorded on the sheet
 T.32N., R.31W.

649S
 Registration Number

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 23rd day of April, 1976, was noted on the cross-index plat and is assigned page No. 452, in book No. 1

Eleanor L. Vaughn Max Watson
 County Official Deputy

Cross Index No. 32 T. 32 R. 31 Mer.