

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner: NN 1/64 Corner; Secs. 7&12 T. 32N. R. 33W. P.M.M. Lincoln County  
NN 1/64 Corner; Secs. 12&7 T. 32N. R. 34W.

1982 Record:  
 (Hill, 5612S)

At the determined corner position, set a 5/8 ins. x 24 ins. aluminum rod, 23 ins. in the ground with aluminum cap and collar of stone from which:

A fir, 12 ins. dia., bears N50°E, 14.3 ft., marked "1/64S7BT"  
 A fir, 6 ins. dia., bears S50°W, 33.0 ft., marked "1/64S12BT"

Location poster attached to a 25 ins. dia. fir which bears N40°W, 10.6 ft.

2010 Found:

We find a 3-1/4 ins. dia. aluminum cap, set flush with ground, marked as shown below from which:

A fir, 14 ins. dia., bears N45°E, 14.3 ft., with an overgrown heel blaze.  
 A fir stump, 11 ins. dia., bears S53°W, 33.0 ft., with visible scribing in a partially overgrown heel blaze.

2010 Perpetuation:


Establish new bearing tree as follows:

A Grand fir, 12 ins. dia. bears S12°W, 10.3 ft., scribed "1/64 S12 RM".

Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.

Metal spike driven into BT's side center at point of measurement

Set a galvanized steel post set East, 0.6 ft from the monument, with LSM and USFS boundary decals.

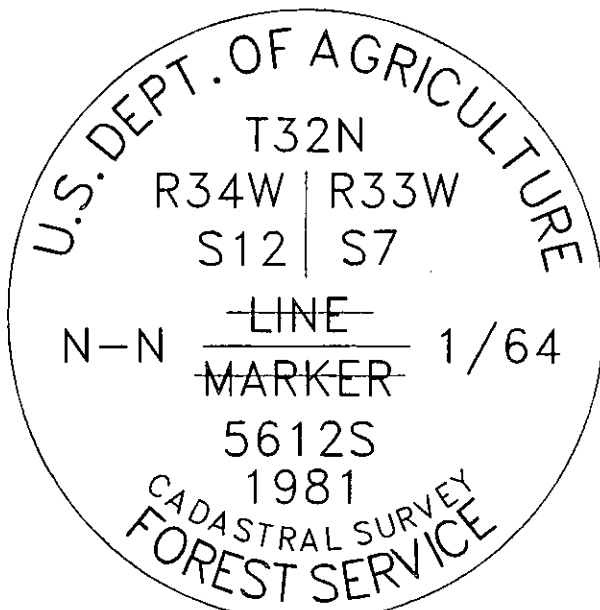

**SKETCH OF CORNER**

### CERTIFICATION

I, Travis R. Williams  
 certify the information shown herein is true and correct.

Travis R. Williams  
 Signature Ground Party Chief

I, Ken E Jenkins  
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, M.C.A.)

Ken E Jenkins  
 Signature of Surveyor & Seal

Date: 12/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

P.O. Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Sec. 7

Office of Clerk and Recorder, County of \_\_\_\_\_

231802 BOOK: CCR CC&R'S PAGE: 11771 Pages: 1

record" was filed for record STATE OF MONTANA LINCOLN COUNTY

RECORDED: 03/30/2011 11:21 KOI: CC&R'S

was noted on the cross-in TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00

BY: Tammy D. Lauer

book No. \_\_\_\_\_

TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Cross Index No. EF-1 T. 32N R. 33W PMM

● - Corner this sheet

