

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATIONCorner: Sec. Corner, Sections 1, 6, 31 & 36 T. 31, 32N. R. 33, 34W. P.M.M. Lincoln County

1893 GLO Record: Set post and established 4 bearing trees.

1910 Record: Reset post.
(Lyman)

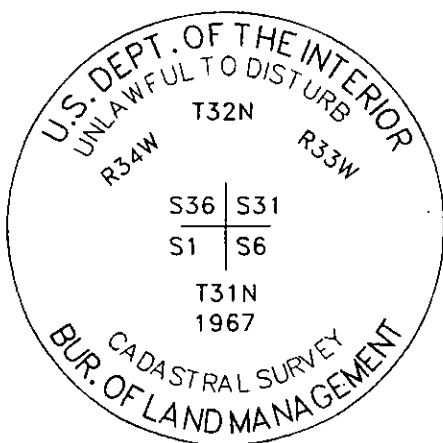
1968 Record: Found iron bar & the remains of 1 original bearing tree.
(Dammn) Set iron post with brass cap. Buried original iron bar alongside. Established 3 new bearing trees.

1983 Record: 1967 BLM Record: From original found evidence, set 2-1/2 ins. dia. iron post. Established 3 new bearing
(Hill 5612S) trees. Found 2-1/2 ins. dia. iron post, 4 ins. out of the ground, with brass cap. From which:
Larch, 21 ins. dia., bears S33°W, 7.8 ft., w/ healed face
Douglas Fir, 11 ins. dia., bears N24°W, 22.4 ft., w/ healed face
Douglas Fir, 11 ins. dia., bears N20°E, 22.7 ft., w/ healed face
Douglas Fir, 10 ins. dia., bears S49°E, 23.3 ft., w/ healed face

1993 Record: Found 2-1/2 ins. dia. iron pipe, 3 ins. above the ground, firmly set with a 3-1/4 ins. dia. BLM brass cap.
(Hughes 7322LS) From which:
Larch, 14 ins. dia., bears N20°30'E, 57.6 ft., w/ healed face
Pine, 8 ins. dia., bears S34°E, 56.1 ft., w/ healed face
Larch, 14 ins. dia., bears S67°30'W, 57.2 ft., w/ healed face

2010 Found: We find a 3-1/4 ins. dia. brass cap, as shown below, on 2-1/2" dia. pipe, rising 0.5 ft. from a mound of
stone. From which:
Douglas Fir, 14 ins. dia., bears N20°E, 22.4 ft., w/ overgrown blaze & BT tags
Douglas Fir, 11 ins. dia., bears S54°E, 23.1 ft., w/ overgrown blaze & BT tags
Larch, 20 ins. dia., bears S30°W, 7.3 ft., w/ overgrown blaze & BT tags
Douglas Fir, 12 ins. dia., bears N25°30'W, 22.4 ft., w/ overgrown blaze & BT tags
Fence post, bears North, 2.2 ft.
NOTE: Found bearing and distances to reference monuments do not match record.

2010 Perpetuation: We establish no new reference monuments.
Bearing trees were affixed with BT tags and a painted red band.

**SKETCH OF CORNER****CERTIFICATION**I, Keith Brandt
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Ken E Jenkins
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor & Seal

Date: 10/2010 Reg. No. 9330 LSEmployer: Montana Northwest CompanyPO Box 8777, Missoula, MT 59807406-721-4033 Project No. 1617-10

Office of Clerk and Recorder, County of _____ This "corner

record" was filed for record

was noted on the cross-index

book No. _____

231803 BOOK: CCR CC&R'S PAGE: 11772 Pages: 1

STATE OF MONTANA LINCOLN COUNTY

RECORDED: 03/30/2011 11:22 KOI: CC&R'S


TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00

TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 31

Cross Index No. Z1 T. 32N R. 33W PMM

● - Corner this sheet