

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner  $\frac{1}{4}$  S 31 | S 32 T. 32 N., R. 33 W., P.M.M. Lincoln County

## 1. {a} 1904 Original Record:

Set a slate stone, 16x12x5 ins., 11 ins. in the ground, for  $\frac{1}{4}$  Sec. Cor., marked  $\frac{1}{4}$  on W. face; from which:

A fir, 8 ins. diam., bears S.  $71^{\circ}20'$  W., 33 lks. dist., marked  $\frac{1}{4}$  S 31 BT.

A fir, 24 ins. diam., bears S.  $50^{\circ}$  E., 25 lks. dist., marked  $\frac{1}{4}$  S 32 BT.

## 1. {b} 1915 H.E.S. No. 416 Record:

Found a slate stone, 5x12x5 ins. above ground marked and witnessed as described by Surveyor General. Set a stake alongside marked 1 H.E.S. 416 on NE face

From the cross on the  $\frac{1}{4}$  corner:

A cross {x} on a fir, 30 ins. dia., bears S.  $47^{\circ}55'E.$ , 24 lks. dist.

A cross {x} on a fir, 15 ins. dia., bears N.  $46^{\circ}50'E.$ , 54 lks. dist.

Both trees blazed and marked 1 H.E.S. 416 BT.

Raise a mound of earth 4 ft. base, 2 ft. high, NE of corner.

## 2. 7/26/83 Evidence Found:

A dead fir snag, 16 ins. dia., bears N.  $47^{\circ}$  E., 54 lks. dist., marked: 1 H.E.S. 416 BT and 1 H.E.S. 411 BT.

A fir stump, 30 ins. dia., bears S.  $48^{\circ}$  E., 24 lks. dist., with very bottom of face identifiable.

## 3. 8/4/83 Perpetuation:


Set a  $\frac{5}{8}$  inch dia. x 24 inch long rebar with yellow PVC cap stamped: MDL 4232S at record distances from found B.T.s noted in item 2. above.

From which new bearing trees:

A Doug. Fir, 7 ins. dia., bears N.  $35^{\circ}$  W., 14.5 ft. dist., marked: Cor 1 HES 416,  $\frac{1}{4}$  S31 BT.

A Doug. Fir, 15 ins. dia., bears S.  $72^{\circ}$  E., 50.9 ft. dist., marked: Cor 1 HES 416,  $\frac{1}{4}$  S32 BT.

All B.T.s painted red. New B.T.s with snow blazes painted red and tagged with St. Regis Location Posters.

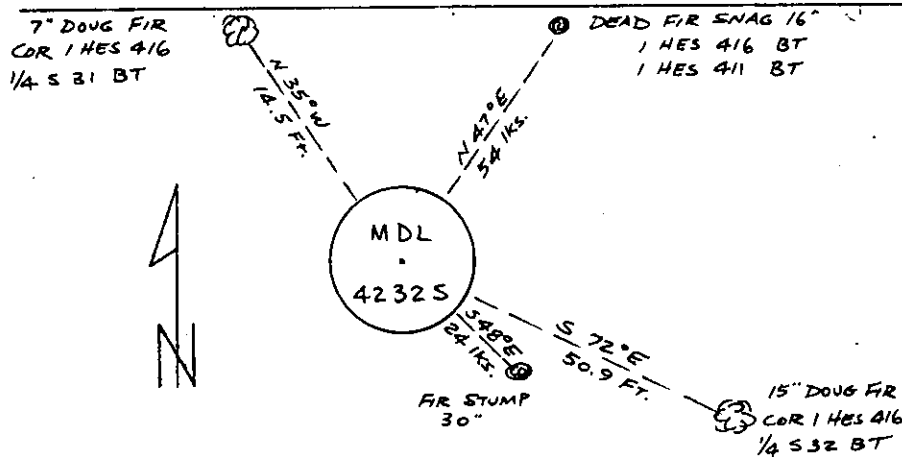

SKETCH OF CORNER

## CERTIFICATION

L.A. Dolezal

certify the information shown herein is true and correct.

*L.A. Dolezal*  
Signature Ground Party Chief

Melvin D. Lauteren

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, M.C.A.)

*Melvin D. Lauteren*  
Signature of Surveyor & Seal

Date: 8/11/83 Reg. No. 4232S

Employer: Kootenai Engineering, Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" Sec. 32, T 32 N, R 33 W, PMM  
was filed for record on the 16<sup>th</sup> day of August 1983, was noted on the cross index plat and  
is assigned page No. 2280, in book No. Janet BF Seigel by Betty L. Conces  
County Official deputy

Cross Index No. X-5 T. 32 R. 33 PMM