CERTIFIED CORNER RECORDATION

Corner ___2 of HES 731___ T. ___32 N.,___ R. ___33 W.,___ P.M.M. ___Lincoln___ County

I. 1917 HES 731 record by E. R. Johnson: "Set a small stone, marked with a cross(x) under a basalt stone, 26x10x8 ins., 16 ins. in the ground, marked 2 HES 731 on SW face, and a cross(x) on top for the exact corner point, from which

    A cross(x) on a fir, 8 ins. diam., bears S86°45'E, 12 lks.(7.92 ft.) dist.
    A cross(x) on a pine, 8 ins. diam., bears S46°30'W, 36 lks.(23.76 ft.) dist.
    Each blazed and scribed 2 HES 731 BT."

II. Found a stone, 9x8 ins., 8 ins. out of the ground with 2 HES 731 on SW face.

    From which:
    A root crown, bears S86°E, 8.0 ft. dist.
    A root crown, bears S46°W, 23.6 ft. dist.
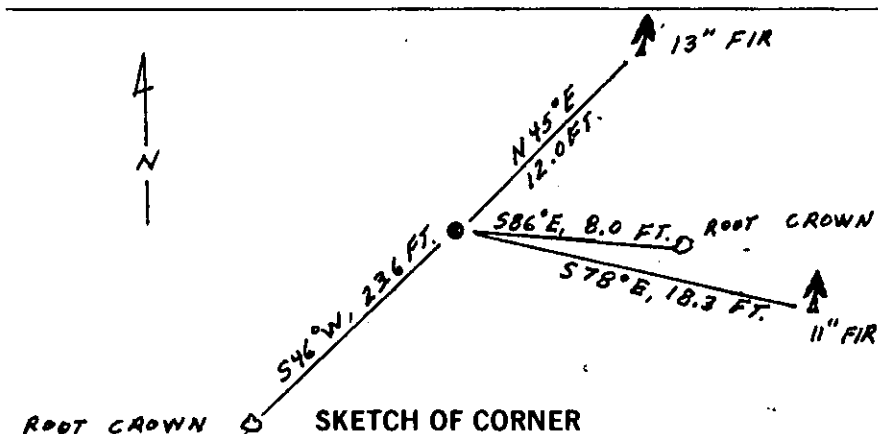
III. Established two new bearings trees:

    A fir, 13 ins. diam., bears N45°E, 12.0 ft. dist., mkd. 2 HES 731 BT.
    A fir, 11 ins. diam., bears S78°E, 18.3 ft. dist., mkd. 2 HES 731 BT.

Painted red bands around the bearing trees and attached "Land Survey Monument" and "Bearing Tree" signs. Set a galvanized steel gaurd post with "Land Survey Marker" and Property Boundary: decals. West, 3 ft.

Magnetic declination: 20° East

SKETCH OF CORNER

CERTIFICATION

I, ___Kevin A. Todd___ certify the information shown herein is true and correct.

___Kevin A Todd___
Signature Ground Party Chief

I, ___Ronald A. Pearson___ certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

___[signature]___
Signature of Surveyor & Seal

Date: ___11/16/92___ Reg. No. ___9008LS___

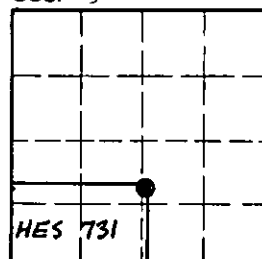Employer: ___U.S. FOREST SERVICE___

Office of Clerk and Recorder, County of ___Lincoln___. This "corner record" was filed for record on ___12-15-92___

was noted on the cross-index plat and is assigned page No. ___5182___, in book No. _____

___Coral M Cummings by BB___
County Official

Cross Index No. ___2 HES 731___ T. ___32 N___ R. ___33W___ PMM

Sec. 5

HES 731

● - corner this sheet