

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 7 of HES 738 T. 32 N. R. 33 W. P.M.M. Lincoln County

- I. 1917 HES 738 record by E. R. Johnson: "Set a small stone, marked with a cross(x) under a sandstone, 26x10x8 ins., 14 ins. in the ground, marked 7 HES 738 on S face, and a cross(x) on top for the exact corner point, from which

A cross(x) on a pine, 9 ins. diam., bears N54°45'E, 10 lks. (6.60 ft.) dist.
 A cross(x) on a pine, 9 ins. diam., bears S51°15'E, 30 lks. (19.80 ft.) dist.
 Each blazed and scribed 7 HES 738 BT."

- II. Found a stone, 10x7 ins., 8 ins. out of the ground with 7 HES 738 on S face.

From which:


A rotten stump, bears S51°E, 19.8 ft. dist.

- III. Established two new bearing trees:

A fir, 11 ins. diam., bears N16°E, 23.5 ft. dist., mkd. 7 HES 738 BT;
 A fir, 6 ins. diam., bears S81°E, 22.9 ft. dist., mkd. 7 HES 738 BT.

Painted red bands around the bearing trees and attached "Land Survey Monument" and "Bearing Tree" signs.
 Set a galvanized steel gaurd post with "Land Survey Marker" and Property Boundary: decals, S76°E, 3 ft.

Magnetic declination: 20° East

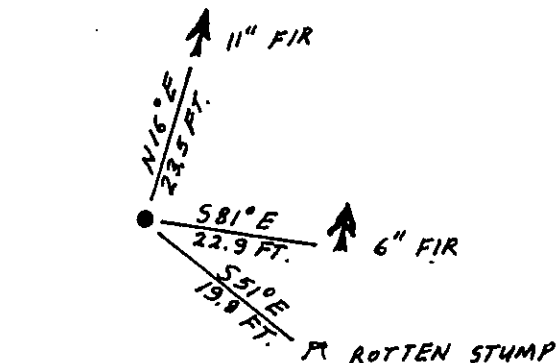


SKETCH OF CORNER

CERTIFICATION
 I, Kevin A. Todd
 certify the information shown herein is true and correct.
Kevin A. Todd
 Signature Ground Party Chief
 I, Ronald A. Pearson
 certify that this Corner Record correctly represents work performed
 by me or under my direction in compliance with the "Corner
 Recordation Act" (70-22-101, et seq., M.C.A.)
Ronald A. Pearson
 Signature of Surveyor & Seal
 Date: 11/16/92 Reg. No. 9008LS
 Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner
 record" was filed for record on 12-15-92
 was noted on the cross-index plat and is assigned page No. 5183, in
 book No. _____

Coral M. Cummings by BCB
 County Official

7 HES 738 32 N. 33W
 Cross Index No. _____ T. _____ R. _____ PMM



• - corner this sheet