

CERTIFIED LAND CORNER RECORDATION

SEC. 36, TWP. 32 N., R. 34 W., M.P.M.

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

1. Brass cap and bearing trees by B.L.M.
2. Not previously set.
3. Brass cap and bearing trees by B.L.M.
4. Railroad tie 4 Ft. below ground and 3 Ft. above (scribed).
5. Not previously set.
6. Stone and bearing trees orig.
7. Not previously set.
8. Brass cap and bearing trees by B.L.M.
9. Not previously set.
10. Brass cap and bearing trees by B.L.M.

NOTE: Numbers refer to sketch on back.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: Nov. 1971

1. Brass cap and bearing trees by B.L.M.
2. Set a 1 1/2" X 4 Ft. bolt 3 Ft. in ground, (in stone mound), from which an 8" cedar bears S 21° E 4.4 Ft. A 10" fir bears N 34° W 20.9 Ft. Both trees scribed E 1/16 and posted.
3. Brass cap and bearing trees by B.L.M.
4. A railroad tie set during previous survey.
5. Set a "T" bar from which a 14" fir bears S 24° 40' W 8.5 Ft. An 8" fir bears N 60° W 8.9 Ft. Both are scribed C 1/16 E and posted.
6. Stone and bearing trees (not used this survey)
7. Set a "T" bar from which a 10" fir bears N 59° E 13.1 Ft. A 10" fir bears S 59° W 3.6 Ft. Both are scribed S 1/16 E and posted
8. Brass cap and bearing trees by B.L.M.

SEE REVERSE

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

SEE REVERSE

Surveyor's Seal



I, Jack H. Ninneman
certify that the information shown herein is true and correct.

Jack H. Ninneman
Signature of Ground Party Chief

I, Jack W. Ninneman
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Jack W. Ninneman
Signature of Surveyor

DIAGRAM OF CORNER:

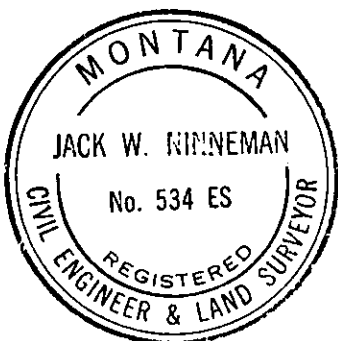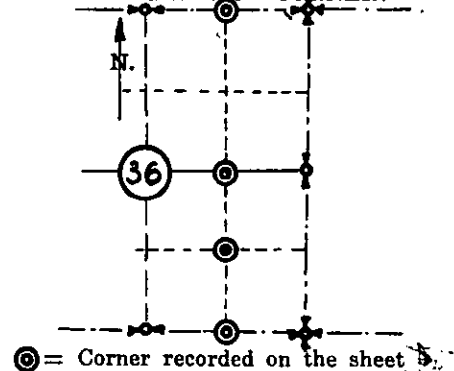

Mont. 534 ES
Registration Number

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 14th day of January 1972, was noted on the cross-index plat and is assigned page No. 255, in book No. 1

Eleanor L. Vaughn
County Official

- Description of monument and accessories established to perpetuate the original location of this corner: (con't)
9. Set a brass cap from which a 12" fir bears N 30° W 9.8 Ft. scribed E 1/16 S 36 B.T. and posted. A 10" fir bears S 9° E 22.8 Ft. scribed E 1/16 S 1 B.T. and posted.
 10. Brass cap and bearing trees by B.L.M.

