DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

FOUND: None

RECORD: No previous record

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: DEC 1975


We set a 1 1/2" I.D. x 30" brass-capped pipe 24" in ground, stamped as per sketch.

We make 2 reference monuments as per sketch.

We also set steel posts with lcoation poster as per sketch.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.

(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

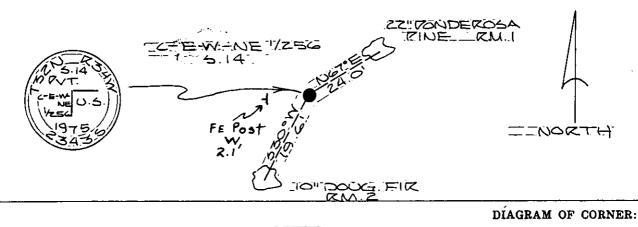

Surveyor's Seal

certify that the information shown herein is true and correct.

certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same

= Corner recorded on the sheet

Signature of Surveyor

T32N R34W P.M., M.

N.

Registration Number

Office of Clerk and Recorder, County of	/15 ρ.m.
This "corner record" was filed for record on the day of	manch 1974 was noted on the cross-index plat and is
assigned page No. 431, in book No.	Eleanor Z. County Official Light Super
	Cross Index No. K-19-20 T. 32N R. 34W Mer.