

CERTIFIED LAND CORNER RECORDATION

(REFERENCE FSM 7153-53)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

FOUND: Original Stone, 18 x 10 x 10 INCHES, LOOSE, SCRIBED 1/4.

RECORD: Set a limestone 18 x 10 x 10 ins., 12 ins. in the ground, for 1/4 Sec. Cor., marked 1/4 on W. face

(From which) an aspen, 14 ins. diam., bears N 64° 30' E, 29 lks. dist., marked 1/4 S. 18 B.T.


A Fir, 6 ins. diam., bears S 87° W, 15 lks. dist., marked 1/4 S. 13 B.T.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

We set a 1 1/2" I.D. x 30" Brass Cap Pipe 24 " in the ground. Date of work: SEPT 9 1975
Original stone buried alongside pipe. Brass cap scribed as per sketch. Reference monuments, pipe, and rock mound painted red.

Reference trees tagged with bearing and dist. as per sketch.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

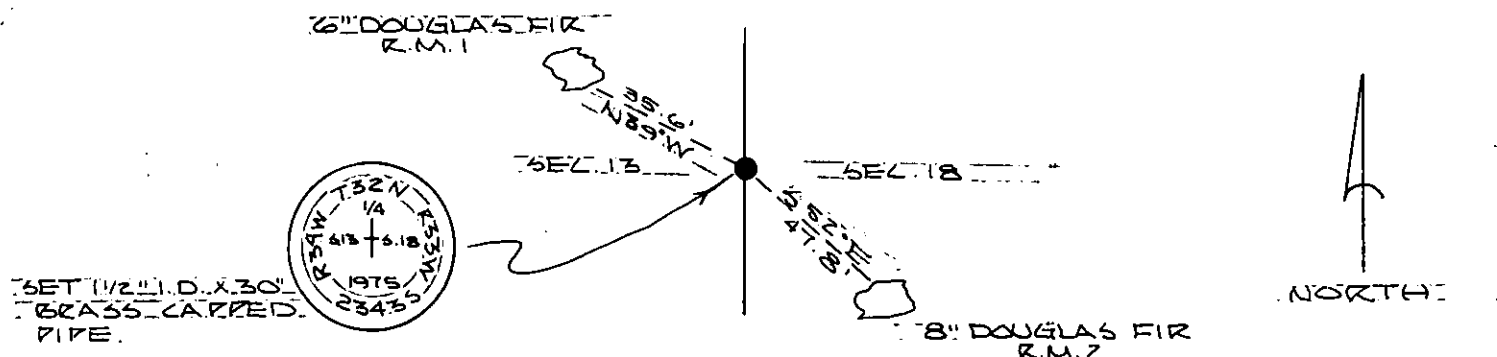

Surveyor's Seal


I, R. G. RILEY
certify that the information shown herein is true and correct.

R. G. Riley
Signature of Ground Party Chief

I, J. T. SHAW
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

J. T. Shaw
Signature of Surveyor

DIAGRAM OF CORNER:

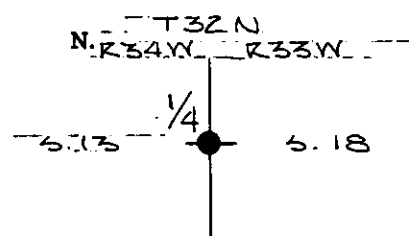

● = Corner recorded on the sheet
T32N R34W 1/4 R33W 18

23435
Registration Number

Office of Clerk and Recorder, County of Lincoln 1:35 p.m.

This "corner record" was filed for record on the 4th day of March 1976, was noted on the cross-index plat and is assigned page No. 435, in book No. 1

Elamou Z. Hughes by *Sherry Davis*
County Official deputy

Cross Index No. T-25 T32N R34W 1/4 R33W 18 Mer.