(REFERENCE FSM 7153.53)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

FOUND: None

RECORD: No previous record


DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: PEC 1975

We set a $1\ 1/2$ " I.D. x 30" brass-capped pipe 24" in ground, stamped as per sketch.

We make 2 reference monuments as per sketch.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

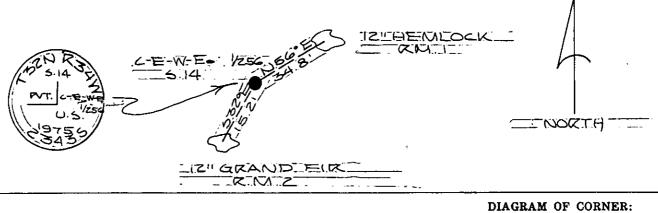

Surveyor's Seal


I, TRERILEY certify that the information shown herein is true and correct.

Months of Mily Signature of Ground Party Chief

I, JUT SOAYY certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Signature of Surveyor

2343 S Registration Number



= Corner recorded on the sheet -W-E 1/256 5.174 32N R34W

F.M.,M

| Office of Clerk and Recorder, County of | 1:40 p.m. |
|---|---|
| This "corner record" was filed for record on the 4th day of | Manch 19.74 was noted on the cross-index plat and is |
| assigned page No. 436, in book No. | Eleanor F. Waughn, by Sherry Davis County Official |
| | Cross Index No. 4-19-20 m 32 A) = 5 371 AV |