

CERTIFIED LAND CORNER RECORDATION
(REFERENCE FSM 7153.53)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

FOUND: None

RECORD: No corner set

**DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**


Date of work: DEC 1975

We set a 2" I.D. x 30" Aluminum Cap 24" in ground for corner monument.
We make mound of rocks around pipe & paint red. Monument stamped
as per sketch below.

We make 2 new RM's scribed, signed and painted red. RM description
in sketch below.

We also set steel posts with location poster as per sketch.

**SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)**

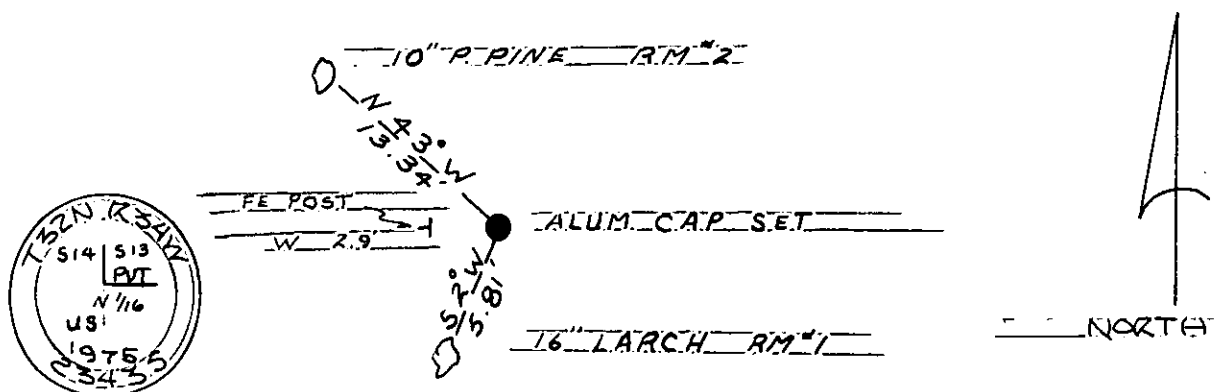

Surveyor's Seal


I, R. G. RILEY
certify that the information shown herein is true and
correct.

[Signature of R. G. Riley]
Signature of Ground Party Chief

I, J. T. SHAW
certify that I have carefully performed or reviewed the
work done on the diagrammed corner as reported on this
recording form and approve the same.

[Signature of J. T. Shaw]
Signature of Surveyor

DIAGRAM OF CORNER:



● = Corner recorded on the sheet
N. 16 S. 13 T. 32 N. R. 34 W.
D. M., M.

23435
Registration Number

Office of Clerk and Recorder, County of Lincoln 1:55 p.m.

This "corner record" was filed for record on the 4th day of March 1976, was noted on the cross-index plat and is
assigned page No. 439, in book No. 1

Eleanor J. Vaughn, by Sherry Davis
County Official deputy

Cross Index No. K. 2 T. 32 N R. 34 W Mer.