

# CERTIFIED LAND CORNER RECORDATION

(REFERENCE FSM 7153.53)

## DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

FOUND: 2 Bearing trees of record, no sign of original stone.

RECORD: (Corner) falls on a stone 30 x 10 x 3 ins. above ground. I cut a cross (+) at exact corner point, for 1/4 sec. corner, marked 1/4 on N. side; from which

a fir 12 ins. diam., bears N. 82° E., 39 lks. dist. marked 1/4 S. 12 B.T.

a fir 12 ins. diam., bears S. 80° E., 32 lks. dist., marked 1/4 S. 13 B.T.

## DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


Date of work: SEPT 1975

### REMONUMENTATION:

We set a 4" DIAM. brass disk, stamped as per sketch, in apoxy, at record dist. from the bearing trees. Painted immediate area around brass disk and bearing trees red.

Placed bearing tree signs complete with bearing and distance to corner on the two bearing trees.

## SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

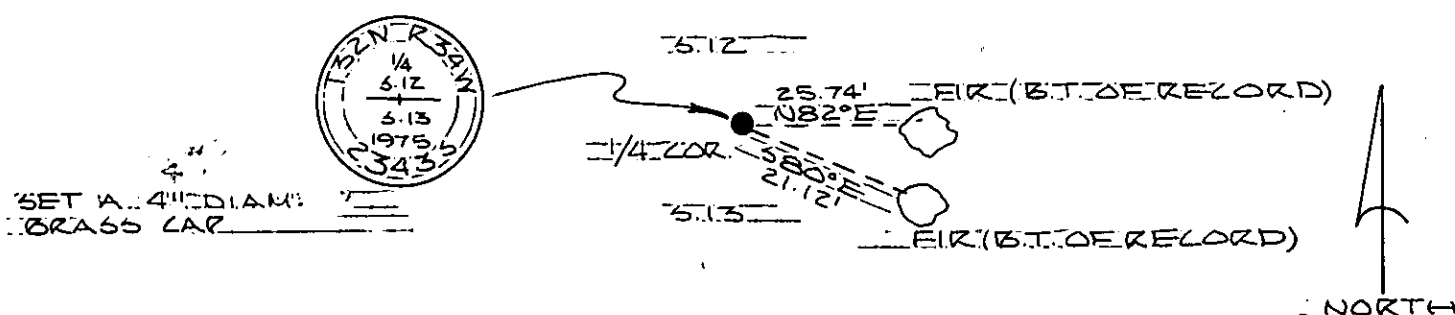

Surveyor's Seal

I, R. G. RILEY  
certify that the information shown herein is true and correct.


*R. G. Riley*  
Signature of Ground Party Chief

I, J. T. SHAW  
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

*J. T. Shaw*  
Signature of Surveyor

### DIAGRAM OF CORNER:

N.



● = Corner recorded on the sheet  
T32N R34W PM, M.

23435  
Registration Number

Office of Clerk and Recorder, County of Lincoln 2:30 p.m.

This "corner record" was filed for record on the 4th day of March 1976, was noted on the cross-index plat and is assigned page No. 446, in book No. 1.

*Elamou Z. Hughes*  
County Official *deputy*

Cross Index No. U-23 T. 32N R. 34W Mer.