DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

FOUND:

None

RECORD: No previous record

## DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


Date of work: DEC. 1975

We set a 1 1/2" I.D. x 30" brass-capped pipe 24" in ground, stamped as per sketch.

We make 2 reference monuments as per sketch.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.

(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

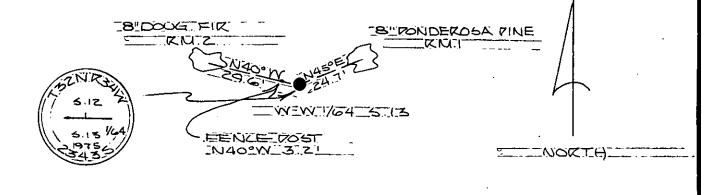

Surveyor's Seal

certify that the information shown herein is true and correct.

Signature of Ground Party Chief

certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

5. 175

N.

Signature of Surveyor

● = Corner recorded on the sheet

W-W-1/64 515 732 0 € 54W

DIAGRAM OF CORNER:

Registration Number

Office of Clerk and Recorder, County of	2:40 p.m.
This "corner record" was filed for record on the day of	Manch 1976 was noted on the cross-index plat and is
assigned page No. 448, in book No.	Eleanow Z. Vaughn, by Sherry David County Official Cliputy
	Cross Index No. J-Z/-ZZ T 3ZN R 34W Mer.