DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

FOUND:

None

RECORD: No previous record

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


Date of work: DE416, 1975

We set a $1\ 1/2$ " I.D. x 30" brass-capped pipe 24" in ground, stamped as per sketch.

We make 2 reference monuments as per sketch.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.

(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

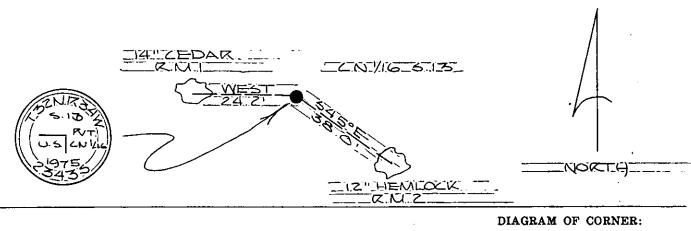

Surveyor's Seal

I, Carrier that the information shown herein is true and correct.

Signature of Ground Party Chief

I, certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same

N.

Signature of Surveyor

O = Corner recorded on the sheet

COLUGE STEET OF THE SHEET

COLUMN STEET O

Office of Clerk and Recorder, County of	2:50 p.m.
This "corner record" was filed for record on the 4th day of Manager 19. 19. (1), was noted on the cross-index plat and is	
assigned page No. 450, in book No.	Eleanor J. Lhughn, by Strenzy David County Official deputy
	Cross Index No. 14-25 T 32N R 34 YY Mer.