

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 Cor. of Secs. 9 & 16 T. 32 N. R. 34 W. P.M.M. Lincoln County


- I. 1903 G.L.O. record by Allen B. Benedict: "Set a limestone, 15x7x5 ins., 10 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face; from which

A fir, 6 ins. diam., bears S34°30'W, 22 lks. dist., mkd. 1/4 S16 BT.
A fir, 16 ins. diam., bears N3°45'W, 10 lks. dist., mkd. 1/4 S9 BT."

- II. Found a stone, 8x6 ins., 6 ins. above ground, loosely set, mkd. 1/4 on N. face; from which

Rotten remains of a fir, bears N4°W, 6.6 ft. (10 lks.) dist.

- III. At corner position, set an aluminum pipe, 2 1/2 in. diam., 30 ins. long, 24 ins. in the ground with 3 1/4 in. diam. U.S.F.S. aluminum cap, marked as shown:



from which

A pine, 5 ins. diam., bears N84°E, 22.4 ft. dist., mkd. 1/4 S9 BT.
A hemlock, 6 ins. diam., bears S3°E, 36.1 ft. dist., mkd. 1/4 S16 BT.


Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Bury the original stone alongside the aluminum monument.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, North, 4 ft.

Magnetic Declination: 20° East

4
N
NO
SCALE

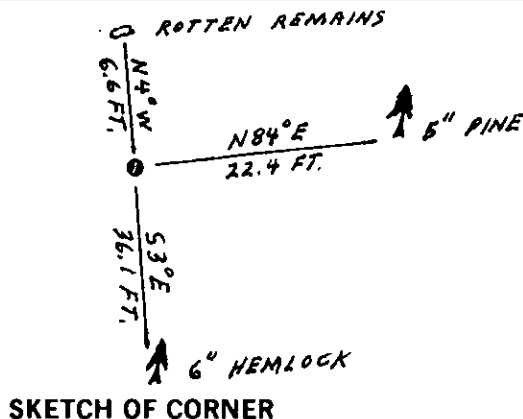

SKETCH OF CORNER

CERTIFICATION

Thomas M. Hommel

I, Thomas M. Hommel

Signature Ground Party Chief

Alvah F. Hughes

I, Alvah F. Hughes

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor Alvah F. Hughes


Date: 12/18/92 Reg. No. 7322LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Jan 19, 1993 was noted on the cross-index plat and is assigned page No. 5318, in book No. Carol M. Cumming & Co

County Official

Cross Index No. J-11 T. 32 N R. 34 W P.M.M.



• - corner this sheet