

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: 1/4 Section Corner; Secs 17, 20 T. 32N. R. 34W. P.M.M. Lincoln County

GLO Record: Set limestone and established 2 bearing trees.

1982 Record: Found original stone out of the ground and the remains of the bearing trees at record bearing and distance.
(Hill 5612 S) Set a 2-1/2 ins. dia. x 30 ins. alum. pipe, w/ alum. cap, 26 ins. in the ground. Buried original stone alongside.
From which:

Larch, 12 ins. dia., bears S83°W, 24.5 ft., mkd "1/4 S20 BT"
Larch, 8 ins. dia., bears N45°E, 21.3 ft., mkd "1/4 S17 BT"

2010 Found: We find a 3-1/4 ins. dia. alum. cap, marked as shown below, flush with a mound of stone.
From which:

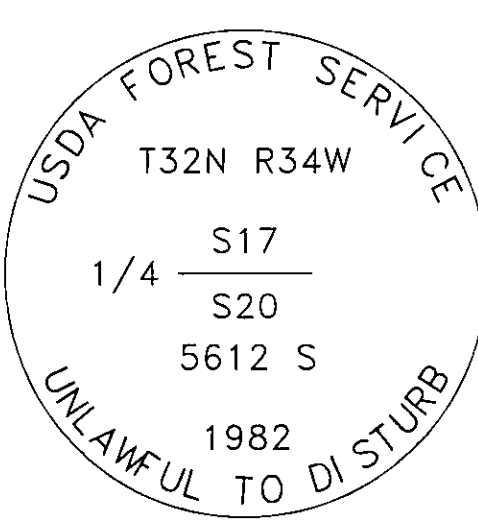
Larch stump, tree cut & lying on the ground, 13 ins. dia., bears S81°W, 24.4 ft., w/visible scribing "1/4 S20" & BT tag
Larch stump, 8 ins. dia., bears N42°E, 22 ft., w/ visible scribing "1/4 S17 BT"

2010 Perpetuation: We establish new reference monuments as follows:

Douglas Fir, 15 ins. dia., bears N26°W, 12.5 ft., scribed "1/4 S17 BT"
Cedar, 10 ins. dia., bears S71°E, 31.2 ft., scribed "1/4 S20 BT"

We set galvanized steel posts, South, 1.8 ft. and West, 1.25 ft. from the monument w/ LSM and USFS boundary decals.

Bearing trees were affixed with BT tags, snow blazed and a painted red band.

 <p>SKETCH OF CORNER</p>	<p style="text-align: center;">CERTIFICATION</p> <p>I, <u>Keith Brandt</u> certify the information shown herein is true and correct. <i>Keith Brandt</i> Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act" (70-22-101, M.C.A.) <i>Ken E Jenkins</i> Signature of Surveyor & Seal</p> <p>Date: <u>9/2010</u> Reg. No. <u>9330 LS</u> Employer: <u>Montana Northwest Company</u> <u>PO Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No. 1617-10</u></p>
--	---

Office of Clerk and Recorder, County of _____ This "corner record" was filed for record o
was noted on the cross-index
book No. _____

231808 BOOK: CCR CC&R'S PAGE: 11777 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 03/30/2011 11:27 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: *Tammy D. Lauer*
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA
County Official

Sec. 17

