

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: CN 1/16 Corner; Sec 20 T. 32N. R. 34W. P.M.M. Lincoln County

1982 Record: No previous record on file. No evidence of corner position found on the ground.
(Hill 5612S) Set a 1-1/2 ins. dia. x 30 ins. alum. pipe, w/ alum. cap, 15 ins. in the ground, in a cairn of stones.
From which:
Douglas Fir, 8 ins. dia., bears N83°W, 10.6 ft., mkd "X BT"
Douglas Fir, 10 ins. dia., bears N44°E, 22.3 ft., mkd "CN1/16 S20 BT"

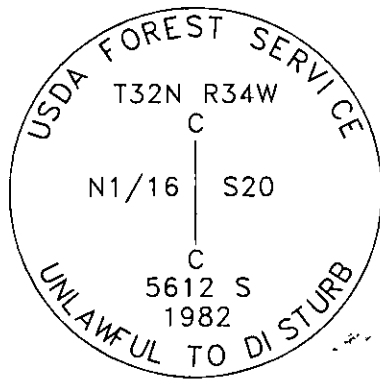
2010 Found: We find 3-1/4 ins. dia. alum. cap, marked as shown below, on 2-1/2 ins. dia. alum. pipe, rising 0.3 ft. above a mound of stone.
From which:
Douglas Fir, dead, downed, 8 ins. dia., bears N80°W, 10.6 ft., w/ BT tag, no visible scribing
Douglas Fir, dead, downed, 10 ins. dia., bears N34°E, 22.3 ft., w/ BT tag, no visible scribing

2010 Perpetuation: We establish new reference monuments as follows:

Ponderosa Pine, 13 ins. dia., bears N18°30'E, 105.4 ft., scribed "CN 1/16 S20 BT1"
Lodge Pole Pine, 8 ins. dia., bears S25°E, 45.8 ft., scribed "CN 1/16 S20 BT2"

We set galvanized steel posts, North, 2.1 ft. and East, 2.5 ft. from the monument w/ LSM and USFS boundary decals.

Bearing trees were affixed with BT tags, snow blazed, and a painted red band.

 <p>SKETCH OF CORNER</p>	<p style="text-align: center;">CERTIFICATION</p> <p>I, <u>Keith Brandt</u> certify the information shown herein is true and correct. <i>Keith Brandt</i> Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, M.C.A.) <i>Ken E Jenkins</i> Signature of Surveyor & Seal</p> <p>Date: <u>11/2010</u> Reg. No. <u>9330 LS</u> Employer: <u>Montana Northwest Company</u> <u>PO Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No. 1617-10</u></p>
--	---

Office of Clerk and Recorder, County of _____ This "corner record" was filed for reco
231812 BOOK: CCR CC&R'S PAGE: 11781 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 03/30/2011 11:31 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: *Tammy D. Lauer*
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA
County Official

Sec. 20

