

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**

E-E 1/64 Corner  
Corner: Section 13 & 24 T. 32N. R. 34W. P.M.M. Lincoln County

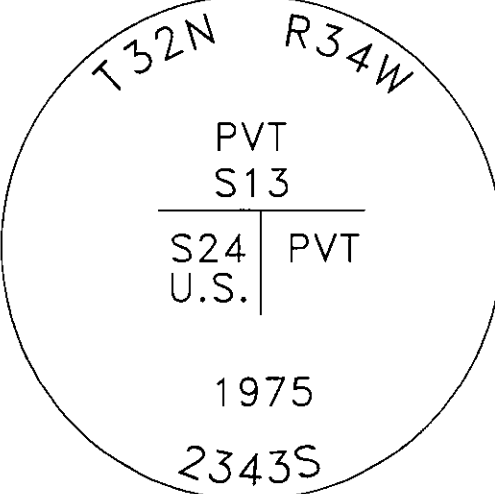
1975 Record: No previous record.  
(Shaw 2343S) Set a 1-1/2 ins. dia. x 30 ins. Forest Service brass capped pipe, 24 ins. in the ground in a mound of rocks.  
From which:  
A Lodge pole pine, 10 ins. diam., bears N82°W, 47.70 ft., scribed "RM2"  
An Alpine fir, 10 ins. diam., bears S02°W, 40.45 ft., scribed "RM1"

2010 Found: We find a 2-1/2 ins. dia. brass cap, marked as shown below, on 2 ins. dia. steel pipe, rising 0.7 ft. above the ground.  
From which:  
Snag, 15 ins. dia, bears S3°30'W, 40.9 ft., w/ overgrown blaze & BT tag.  
blow down, 10 ins.dia., bears N82°W, 46.5 ft., no visible scribing, BT tag intact.

2010 Perpetuation: We establish new reference monuments as follows:  
  
Douglas fir, 10 ins. dia., bears N80°E, 15.3 ft., blazed and scribed "S13 RM1"  
Grand fir , 7 ins. dia., bears N65°W, 14.5 ft., blazed and scribed "S13 RM2"

We set a galvanized steel post, South, 0.4 ft. from the monument w/ LSM and USFS boundary decals.

Bearing trees were affixed with BT tags, snow blazed, and a red painted band.

 <p><b>SKETCH OF CORNER</b></p>	<p><b>CERTIFICATION</b></p> <p>I, <u>Keith Brandt</u> certify the information shown herein is true and correct. <i>Keith Brandt</i> Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act" (70-21-101, et seq., M.C.A.) <i>Ken E Jenkins</i> Signature of Surveyor &amp; Seal Date: <u>11/2010</u> Reg. No. <u>9330 LS</u> Employer: <u>Montana Northwest Company</u> <u>PO Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No. 1617-10</u></p>
--	--

Office of Clerk and Recorder, County of Lincoln. This "corner  
record" was filed for record 231817 BOOK: CCR CC&R'S PAGE: 11786 Pages: 1  
was noted on the cross-index STATE OF MONTANA LINCOLN COUNTY  
book No. TAMMY D. LAUER CLERK AND RECORDER  
RECORDED: 03/30/2011 11:36 KOI: CC&R'S  
FEE: \$0.00 BY: *Tammy D. Lauer*  
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 24

