

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner: NN 1/64 Corner: Secs. 12&7 T.32N. R. 34W. P.M.M. Lincoln County  
NN 1/64 Corner: Secs. 7&12 T.32N. R. 33W.

1982 Record:  
 (Hill, 5612S)

At the determined corner position, set a 5/8 ins. x 24 ins. aluminum rod, 23 ins. in the ground with aluminum cap and collar of stone from which:

A fir, 12 ins. dia., bears N50°E, 14.3 ft., marked "1/64S7BT".  
 A fir, 6 ins. dia., bears S50°W, 33.0 ft., marked "1/64S12BT".

Location poster attached to a 25 ins. fir which bears N40°W., 10.6 ft.

2010 Found:

We find a 3-1/4 ins. dia. aluminum cap, set flush with ground, marked as shown below from which:

A fir, 14 ins. dia., bears N45°E, 14.3 ft., with an overgrown heel blaze.  
 A fir stump, 11 ins. dia., bears S53°W, 33.0 ft., with visible scribing in a partially overgrown heel blaze.

2010 Perpetuation:


Establish new bearing tree as follows:

A Grand fir, 12 ins. dia. bears S12°W, 10.3 ft., scribed "1/64 S12 RM".

Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.

Metal spike driven into BT's side center at point of measurement

Set a galvanized steel post set East, 0.6 ft from the monument with LSM and USFS boundary decals.

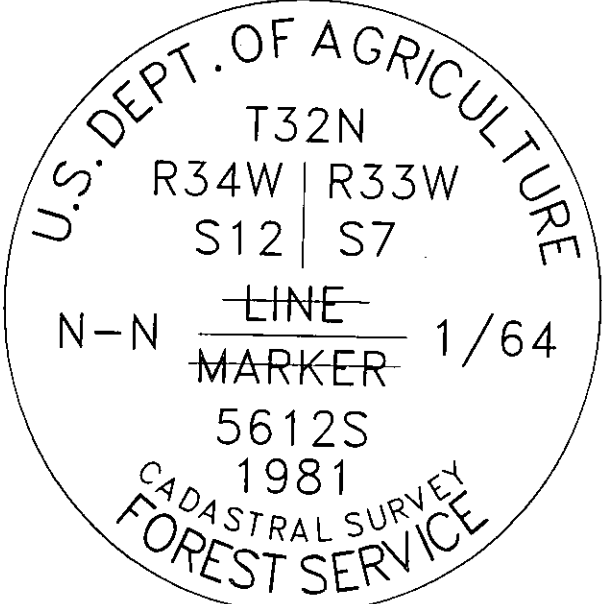 <p><b>SKETCH OF CORNER</b></p>	<p style="text-align: center;"><b>CERTIFICATION</b></p> <p>I, <u>Travis R. Williams</u>          certify the information shown herein is true and correct.  <u>Travis R. Williams</u>          Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u>          certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act" (70-22-101, et seq., M.C.A.)  <u>Ken E Jenkins</u>          Signature of Surveyor &amp; Seal</p> <p>Date: <u>12/2010</u> Reg. No. <u>9330 LS</u>          Employer: <u>Montana Northwest Company</u>  <u>P.O. Box 8777, Missoula, MT 59807</u>  <u>406-721-4033 Project No. 1617-10</u></p>
--	--


Office of Clerk and Recorder, County of

record" was filed for record on  
 was noted on the cross-index p  
 book No. \_\_\_\_\_

231820 BOOK: CCR CC&R'S PAGE: 11789 Pages: 1  
 STATE OF MONTANA LINCOLN COUNTY  
 RECORDED: 03/30/2011 11:39 KOI: CC&R'S  
 TAMMY D. LAUER CLERK AND RECORDER  
 FEE: \$0.00 BY: Tammy D. Lauer  
 TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 12



Cross Index No. EF-25 T. 32N R. 34W PMM

● - Corner this sheet